

Plastic Steel Door And Window O-shaped Strip

Door and window sealing strip series

Introduction

Plastic steel door and window O-type sealing strip is a sealing material specially designed for plastic steel doors and windows. It is usually installed in the sealing groove of the door and window frame to fill the gap between the door and window frame and the glass to prevent external environmental factors such as cold wind, dust, insects and noise from penetrating into the room, while improving the airtightness, sound insulation and thermal insulation of doors and windows.

Specification

Material

PVC rubber etc.

Size

Common sizes include width 5mm - 20mm thickness 3mm - 10mm length can be customized as needed.

Surface Treatment


Smooth surface or textured surface to enhance sealing effect.

Color

White gray transparent and other colors are available and can also be customized according to the color of doors and windows.

Applicable Scenarios

Plastic steel door and window O-type sealing strips are suitable for all types of plastic steel doors and windows, such as casement windows, sliding windows, fixed windows, etc. It is widely used in residential, commercial and other building door and window sealing projects, and plays a role in waterproofing, windproofing, sound insulation and heat preservation.

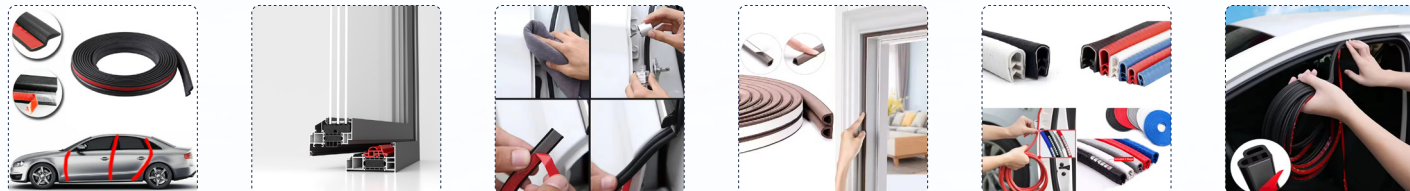

Hengou Automotive Seals

+86 133 6375 2608
+86 151 9491 7757

+86 133 6375 2608
+86 151 9491 7757

Raw Material Inspection

Strict inspection, quality standards

Production Process Control

Strict implementation

Finished Product Inspection

Quality standards

Performance Testing

Resistant to low temperature, aging, etc.

Precautions

1. During installation, ensure that the sealing strip fits tightly to the door and window frame sealing groove to avoid gaps to ensure a good sealing effect.
2. The length of the sealing strip should match the length of the door and window frame sealing groove to avoid poor sealing due to being too long or too short.
3. Check the adhesion of the sealing strip regularly. If it is found to be loose or aging, it should be replaced in time to maintain a good sealing effect.

+86 133 6375 2608
+86 151 9491 7757

info@ho-sealingstrip.com