

EPDM Three-composite Sealing Strip

 [Soft and hard composite sealing strip series](#)

Introduction

This sealing strip combines the advantages of three materials, with the good elasticity and weather resistance of EPDM rubber and the characteristics of the other two materials, thus providing a more diverse sealing solution.

Specification

Material

Composite material of EPDM and two other different materials.

Size

Common sizes include width 5mm - 50mm thickness 2mm - 20mm length can be customized as needed.

Surface Treatment


Smooth surface or textured surface to enhance sealing effect.

Color


Black gray white and other colors are available and can also be customized according to needs.

Application Scenarios

- Residential Doors and Windows: Suitable for wooden doors, aluminum alloy windows, and PVC windows, providing good sealing and sound insulation to maintain a comfortable indoor environment.
- Commercial Buildings: Suitable for stores, office buildings, hotels, etc., offering sound insulation and thermal insulation to improve indoor comfort.
- Industrial Buildings: Suitable for factories, workshops, etc., providing wear-resistant, weather-resistant seals to keep the indoor environment clean and quiet.

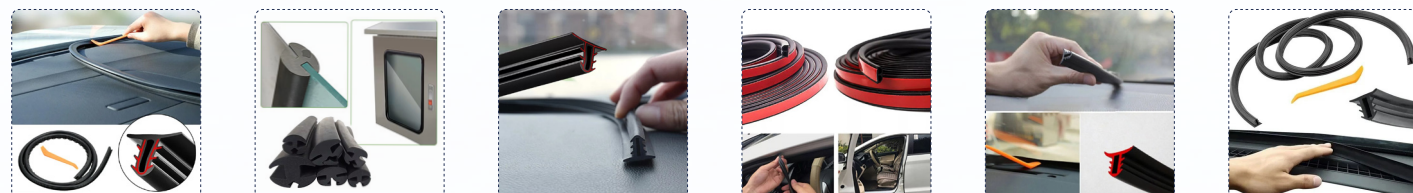

Hengou Automotive Seals

 +86 133 6375 2608
+86 151 9491 7757

 +86 133 6375 2608
+86 151 9491 7757

Raw Material Inspection

Strict inspection, quality standards

Production Process Control

Strict implementation

Finished Product Inspection

Quality standards


Performance Testing

Resistant to low temperature, aging, etc.

Installation Method

1. Clean the installation surface: Make sure that the surface of the door and window frame notch is clean, dry, free of oil and dust.
2. Measuring and cutting: Measure and cut the sealing strip according to actual needs to ensure the appropriate length.
3. Press-in installation: Press the sealing strip into the notch of the door and window frame to ensure that the sealing strip fits tightly with the notch.

 +86 133 6375 2608
+86 151 9491 7757

 info@ho-sealingstrip.com