

Frameless Glass Door Seal

Door and window sealing strip series

Introduction

Frameless glass door sealing strips are sealing materials specially designed for frameless glass doors. They are usually installed on the edge of glass doors to fill the gap between the door and the door frame to prevent cold wind, dust and noise from entering the room, while improving the sealing and sound insulation of the door.

Specification

Material

PVC rubber etc.

Size

Common sizes include width 5mm - 20mm thickness 3mm - 10mm length can be customized as needed.

Surface Treatment


smooth surface or textured surface to enhance sealing effect.

Color

White gray transparent and other colors are available and can also be customized according to the color of doors and windows.

Applicable Scenarios

Frameless glass door seals are suitable for frameless glass doors in commercial buildings, office buildings, hotels and other places. It can effectively prevent cold wind, dust and noise from entering the room, and improve indoor comfort and sound insulation.

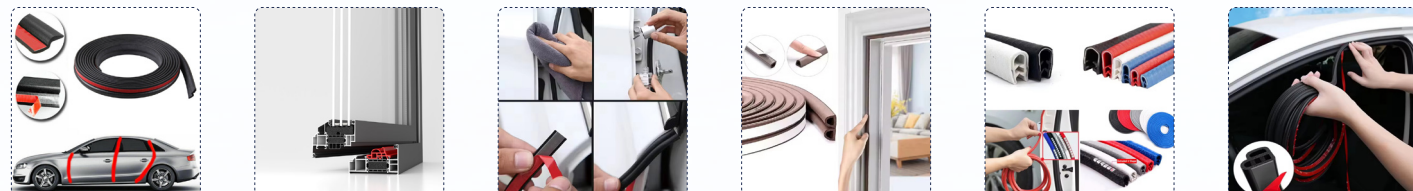

Hengou Automotive Seals

+86 133 6375 2608
+86 151 9491 7757

+86 133 6375 2608
+86 151 9491 7757

Raw Material Inspection

Strict inspection, quality standards

Production Process Control

Strict implementation

Finished Product Inspection

Quality standards

Performance Testing

Resistant to low temperature, aging, etc.

Precautions

1. During installation, make sure that the sealing strip fits the door frame tightly to avoid gaps to ensure a good sealing effect.
2. Avoid stretching or squeezing the sealing strip when pasting to avoid affecting its sealing effect.
3. Check the adhesion of the sealing strip regularly. If it is found to be loose or falling off, replace it in time.

+86 133 6375 2608
+86 151 9491 7757

info@ho-sealingstrip.com