



Huantai

FENCE & METAL MESH



► Company Introduction

Anping Huantai Metal Products Co., Ltd. and Qunli factory is located in Anping County, Hebei Province, China, which is recognized as the 'Hometown of Wire Mesh' in the world. We focus on designing, manufacturing and exporting high-quality wire mesh products, serving various industries such as construction, agriculture, mining and transportation. As the foreign trade department of Huantai Wire Mesh, Anping Huantai Metal Products Co., Ltd. inherits Qunli Wire Mesh's many years of industry experience and technical accumulation, Anping Huantai Metal Products Co., Ltd. and Anping Qunli Silk Screen Manufacturing Co., Ltd. are developing in an integrated way, focusing on designing, manufacturing and exporting high-quality wire mesh products, serving various industries such as construction, agriculture, mining and transportation

Backed by years of experience and state-of-the-art technology, we offer a comprehensive portfolio of wire mesh solutions: Fencing Systems: Security Fencing, Sports Fencing and Garden Fencing. Industrial Wire Mesh: Welded Wire Mesh, Woven Wire Mesh and Perforated Sheet. Agricultural Applications: Poultry Cages, Livestock Fencing and Protective Netting.

Custom Solutions: Tailor-made designs for unique projects, backed by our R&D team. We pride ourselves on combining traditional craftsmanship with modern innovation, ensuring every product meets the highest quality standards.

We have always been committed to maintaining good communication with customers and providing high-quality products for them. We look forward to inquiries from customers all over the world.



园林围栏：Garden Fence Series

3D折弯护栏 V Mesh Fencing	A01
358防攀爬护栏 Anti Climb 358 Fence Panel	A03
双加丝护栏 Twin Wire Mesh Fencing	A05
围墙护栏 Metal Railings Fencing	A07
勾花护栏 Chain Link Fence	A09
铝艺护栏 Aluminum Fence	A11
BRC护栏 BRC fence	A12
不锈钢绳网 Stainless Steel Wire Mesh	A13
栅栏 Palisade Fence	A14

临时移动围栏Temporary Fence Series

勾花临时护栏 Chain Link Temporary Fence for USA	B01
加拿大临时护栏 Temporary Fence for Canada	B02
澳大利亚-新西兰临时护栏 Temporary Fence for AU/NZ	B03
铁马临时护栏 Crowd Control Barrier	B04
车间隔离网 Isolation fence	B05
安全防护围栏 Edge Protection Fence	B06

农场及养殖用网:Farm & Breeding Fence Series

牲畜围栏 (马) Livestock Fencing for Horse	C01
牲畜围栏 (牛) Livestock Fencing for Cattle	C02
牲畜围栏 (羊) Livestock Fencing for Sheep	C03
草原网 Field Fence	C04
六角网 Metal Hexagonal Wire Mesh	C05
轧花网 Steel Crimped Wire Mesh	C06
勾花网 Chain Link Fence	C08

建筑与工程用网 BUILDING MATERIALS AND ENGINEERING MESH

石笼网 Gabion Box/Mesh	D01
焊接石笼网 Welded Gabion Fence	D02
电焊网 Welded Wire Mesh	D03
冲孔网 Perforated Metal Mesh	D04
钢板网 Expanded Metal Mesh	D06
钢格板 Steel Grating	D07
声屏障 Noise Barrier	D08
安全防护围栏 Edge Protection Fence	D09
窗纱 Window Screen	D10
装饰网 Decorative Mesh	D11
墙面收纳板 Wall-mounted Storage Board	D12

目录

catalogue

安全防护网及更多 SAFETY PROTECTION METAL MESH + MORE


刺绳 Barbed Wire	E01
刀片刺绳 Razor Wire	E02
防爆网 Defensive Barrier	E03

Fence & Metal Mesh

Specifications

Specification of 3D garden Fence Panel						
Mesh Opening	Wire Thickness	Panel Width	Panel Height	Rule of bendings	Post Type	color
50x100mm	3.0mm	2000mm	630mm	below 1.5m	Round Post	green
50x150mm	3.5mm	2500mm	830mm	with 2	48x1.5/2.0mm	grey
50x200mm	4.0mm	2900mm	1030mm	bendings,	60x1.5/2.0mm	white
55x200mm	4.5mm		1230mm		Square Post	black
75x150mm	5.0mm		1530mm	above 1.8m	50x50x1.5/2.0mm	All RAL color
			1730mm	with 3	60x60x1.5/2.0mm	can be
			1830mm	bendings,	80x80x1.5/2.0mm	customized
			2230mm		peach post	
			2430mm	above 2.5m	50x70x1.0/1.2mm	
				with 4	70x100x1.0/1.2mm	
				bendings		
Surface Treatment: hot dipped galvanized , galvanized + powder coated , PVC coated , painted						
Product specifications can be customized according to your needs						

Scene Picture

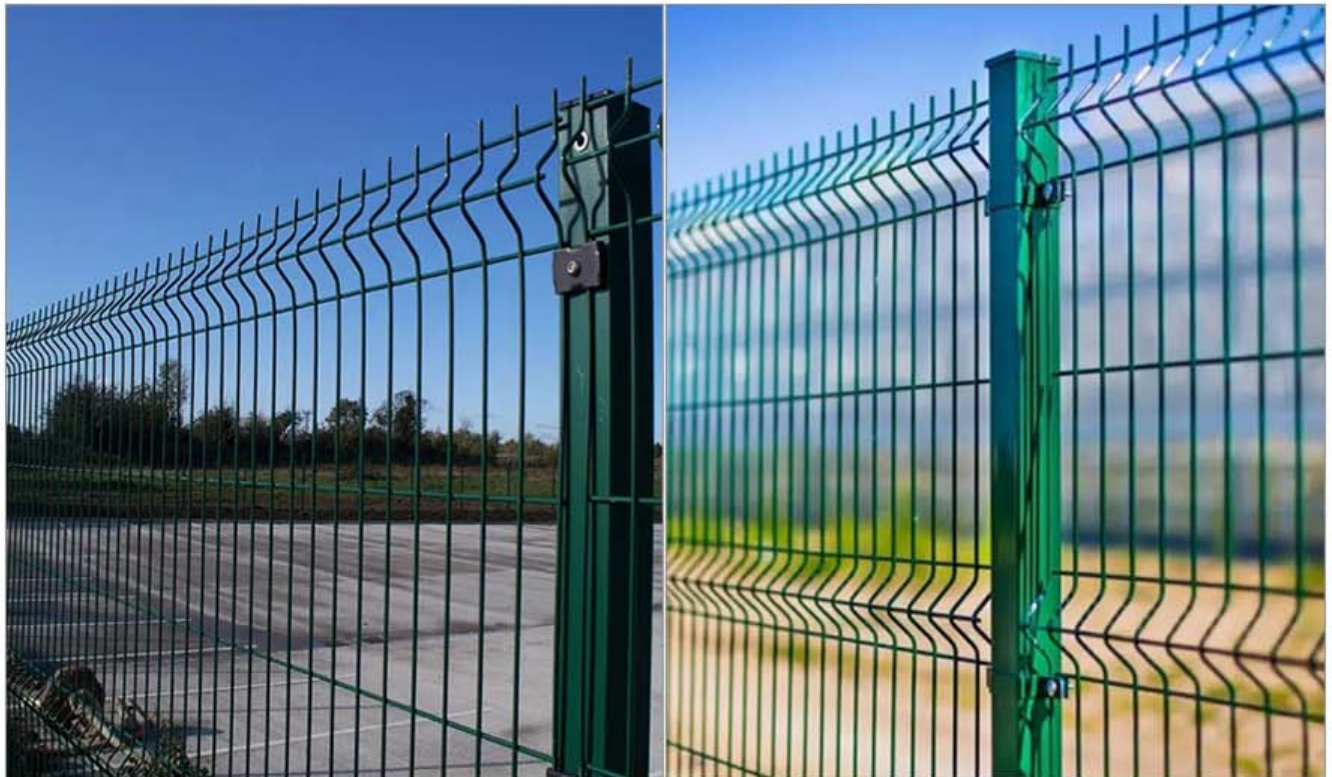


3D折弯护栏 V Mesh Fencing

Detail drawing

Fence & Metal Mesh

A
02

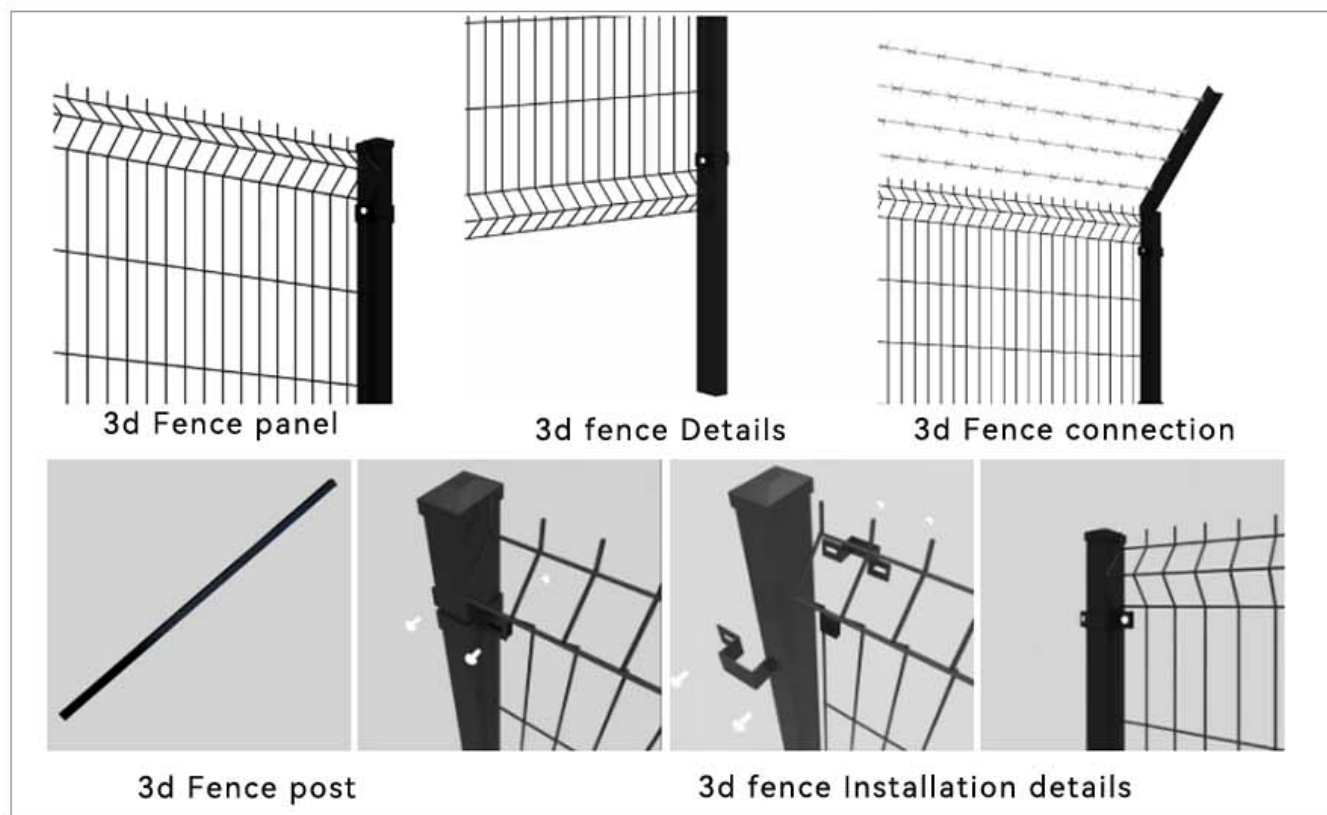

358防攀爬护栏

Anti Climb 358 Fence Panel

Fence & Metal Mesh

Specifications

specification of 358 anti climb fence					
Mesh	Wire Diameter	Panel Width	Panel height	Post Type	
76.2x12.7mm 75.0x12.5mm 75.0x25mm 75.0x50mm	Horizontal Wire: 3.2,3.5,4mm Vertical Wire: 4mm	1m-3m popular: 2.2m/2.5m/3m	1m-6m popular: 2.5m/3m	Square Post(SHS) 60x60x2.0/2.5/3.0mm 80x80x2.0/2.5/3.0mm	Rectangular Post(RHS) 40x60x2.0/2.5/3.0mm 40x80x2.0/2.5/3.0mm 60x80x2.0/2.5/3.0mm
Surface Treatment: hot dipped galvanized , galvanized +powder coated,					
V-top:including angle iron, barbed wire,razor barbed wire					
Connecting Methods:iron bar , hexagonal clamp , screws					
Color:RAL 6005 green, RAL 7016 gray, All RAL color can be customized.					
Product specifications can be customized according to your needs					

A
03

Scene Picture



Email:mark@fencemenu.com

Tel:+86-15127859990

Website:www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.



358防攀爬护栏

Anti Climb 358 Fence Panel

Detail drawing

Fence & Metal Mesh

A
04

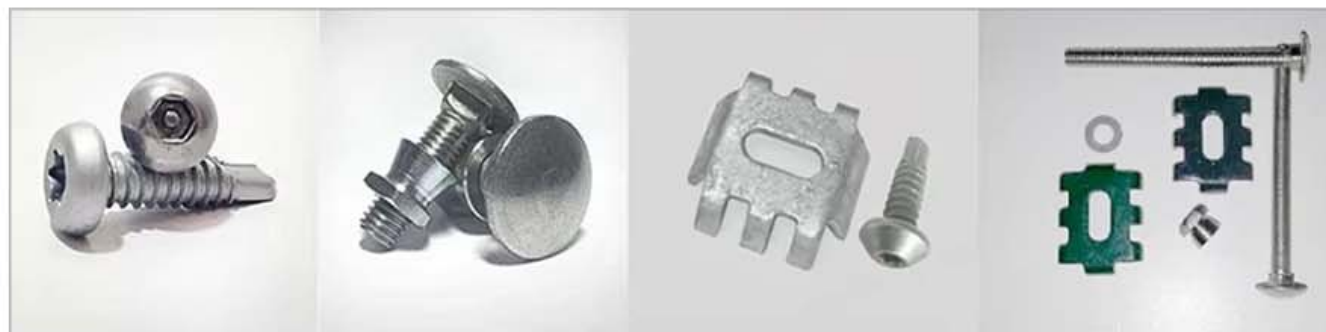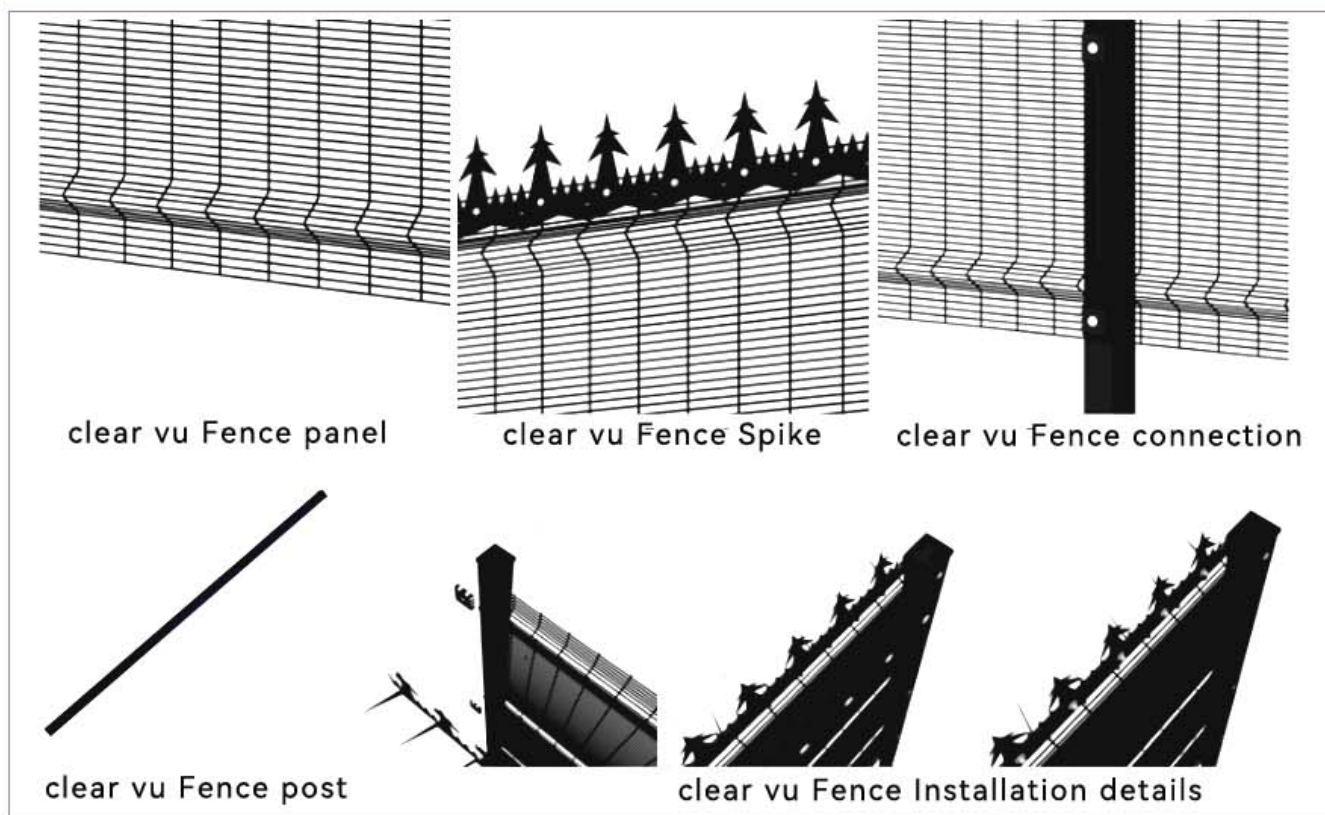

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

双加丝护栏2D

Twin Wire Mesh Fencing

Fence & Metal Mesh

A
05

Specifications

DoppelstabmattenZaun Hot sale germany powder coated 868 double wire fence						
Panel Height	Panel Length	Wire Dia.	Mesh Size	Post	Post Wall Thickness	Post Length
H=1.03m	L=2.5m	6/5/6mm 8/6/8mm	50x200mm	40x60mm 60x60mm 75x75mm 80x80mm 100x100mm	2.0mm 2.5mm 3.0mm	L=1.6m
H=1.23m						L=1.8m
H=1.43m						L=2.0m
H=1.63m						L=2.2m
H=1.83m						L=2.4m
H=2.03m						L=2.6m
Color	RAL6005 Green, RAL9005 Black, RAL7016 Gray					

Scene Picture



Email:mark@fencemenu.com

Tel:+86-15127859990

Website:www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.



双加丝护栏2D

Twin Wire Mesh Fencing

Detail drawing

Fence & Metal Mesh

A
06

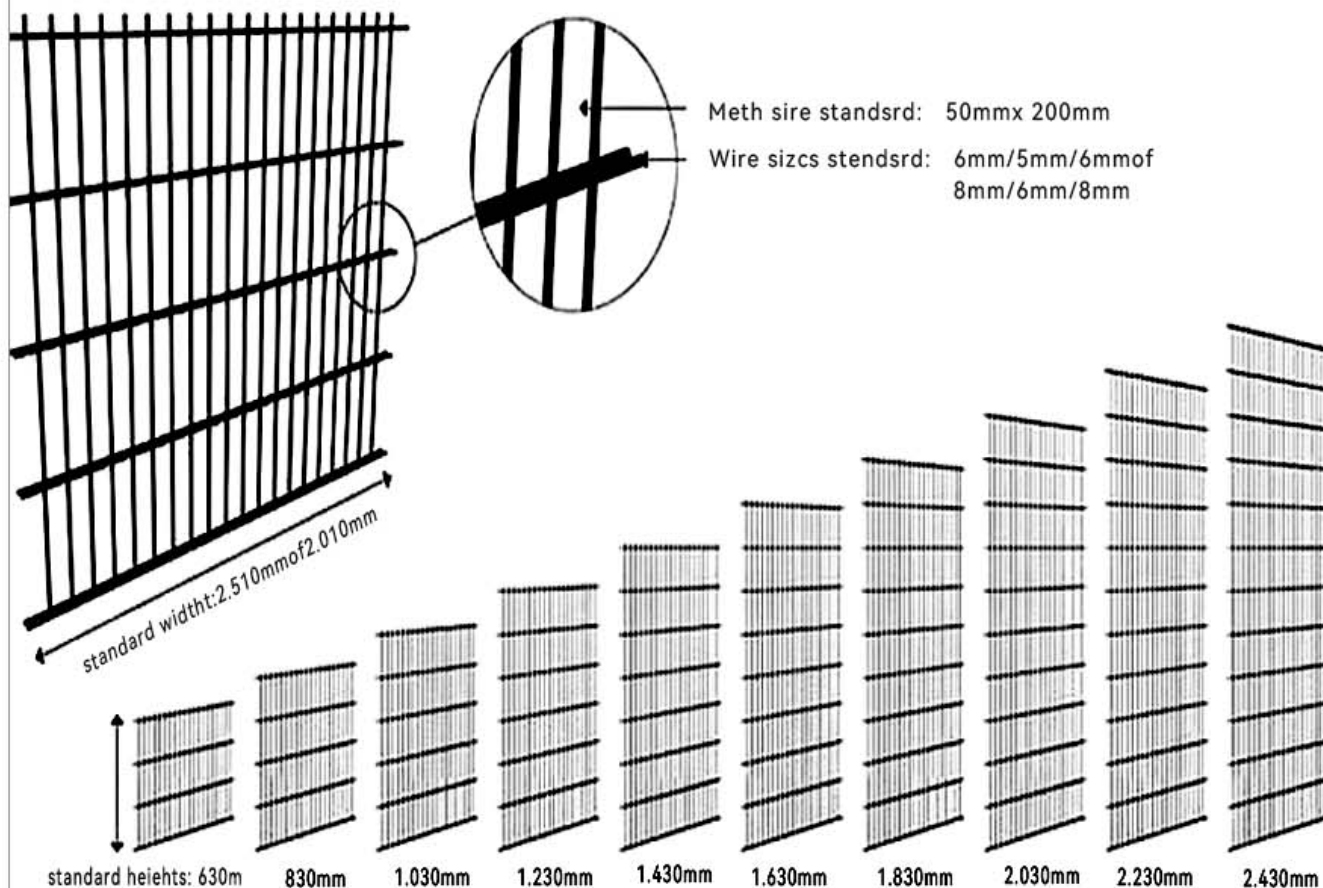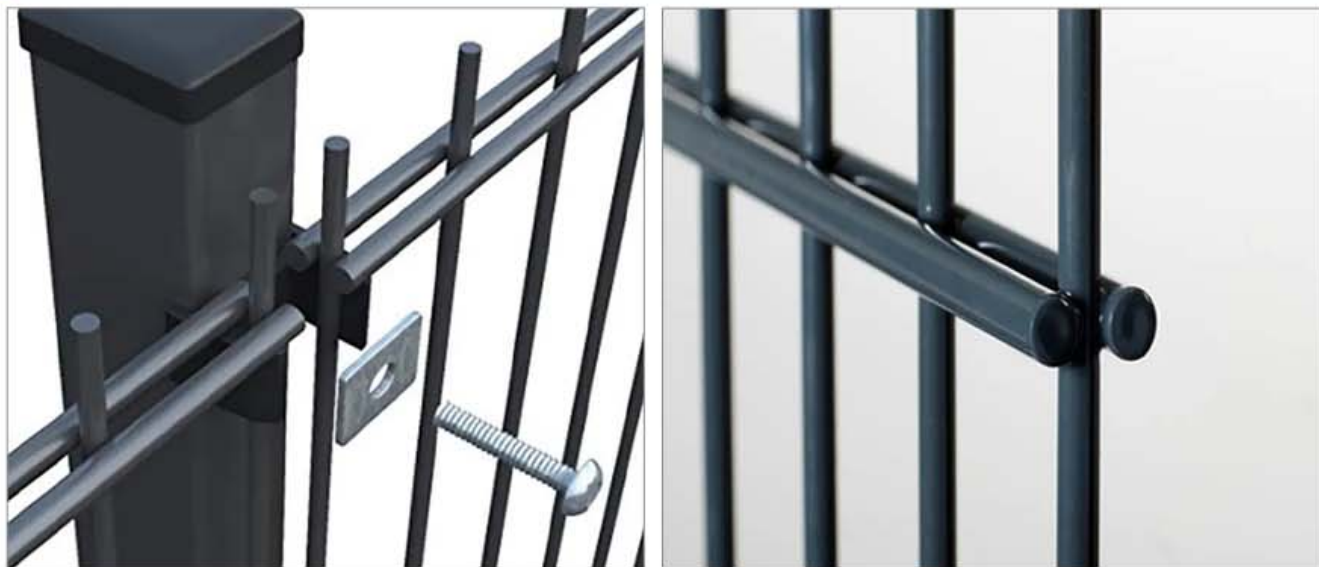

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co., Ltd

Anping Huantai Metal Products Co., Ltd.

围墙护栏 Metal Railings Fencing

Specifications

Panel size	1.8x2.4m (6x8ft), 2.1x2.4m (7x8ft), 2.4x2.4m (8x8ft), etc.
Rail size	40x40mm, 30x30mm, 50x50mm, etc.
Rail thickness	1.0mm, 1.2mm, 1.5mm (usually less than 1.5mm)
Pickets size	19x19mm, 20x20mm, 25x25mm, etc.
Thickness	0.8mm, 1.0mm, 1.2mm etc.
Post size	60x60mm, 50x50mm, 80x80mm etc.
Pickets Spacing (C/C)	150mm,120mm,100mm,90mm,etc
Post Thickness	1.5mm, 1.8mm, 2.0mm etc.
Top point	Flat top, Spearhead top, Bent top
Surface Treatment	Hot dipped galvanized & Powder coated
Color	Popular: RAL 9005 Black, RAL 6005 Dark Green, Blue and White, etc.
Material	Q195 or Q235

Scene Picture



Factory fence



Villa fence





围墙护栏

Metal Railings Fencing

Fence & Metal Mesh

A
08

Detail drawing

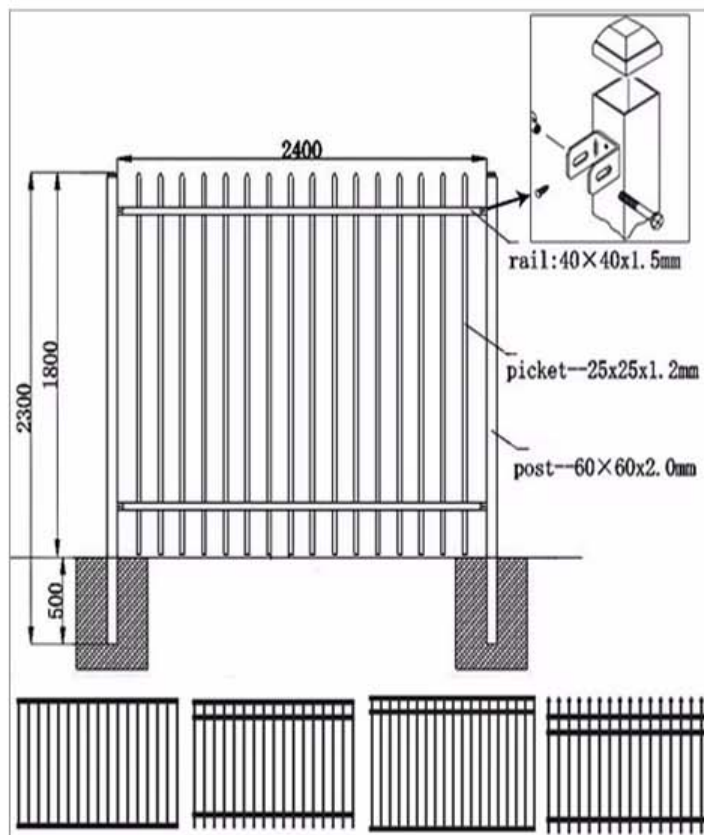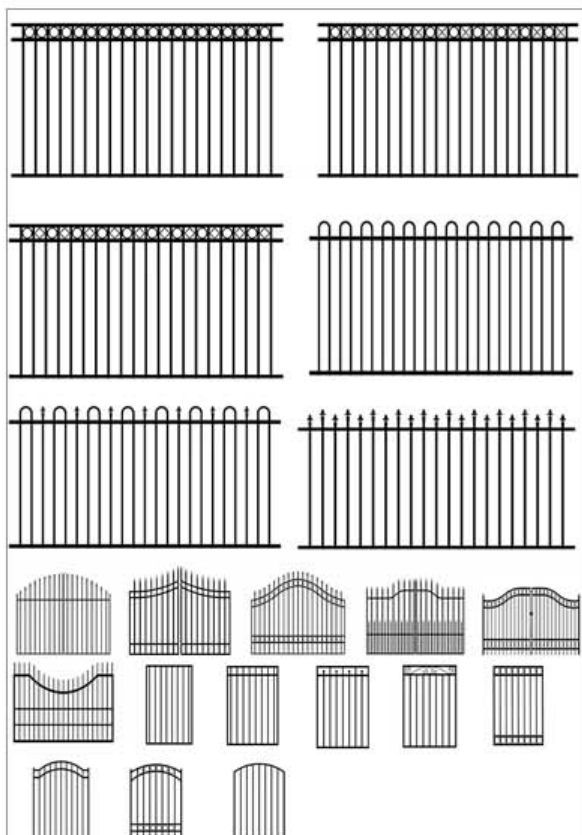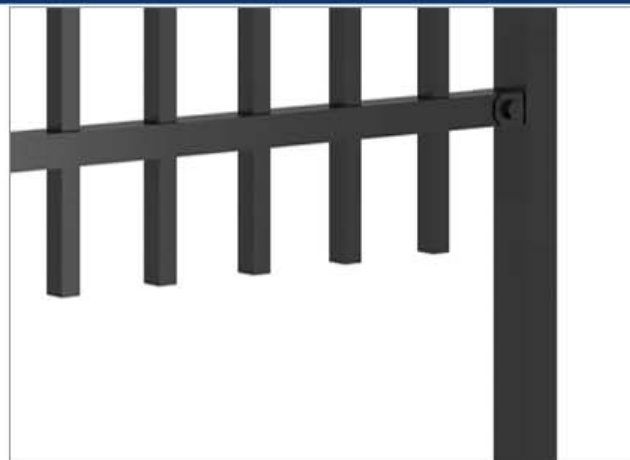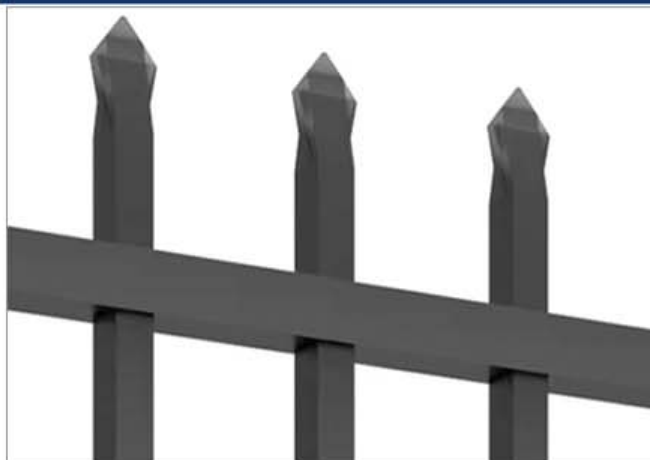

勾花护栏

Chain Link Fence

Fence & Metal Mesh

Specifications

Specification of chain link fence									
Opening	1"	1.5"	2"	2-1/4"	2-3/8"	2-1/2"	2-5/8"	3"	4"
Wire Diameter	25mm	40mm	50mm	57mm	60mm	64mm	67mm	75mm	100mm
	18Ga - 13Ga	16Ga-8Ga						18Ga-7Ga	
	1.2- 2.4mm	1.6mm-4.2mm						2.0mm-5.0mm	
Length of Roll	0.5m-100m(or more)								
Width of Roll	0.5m-5m								
Surface treatment	Hot dipped galvanized or PVC coated								
Material and specification can be made according to customers' detailed requirements									

A
09

Scene Picture



Email:mark@fencemenu.com

Tel:+86-15127859990

Website:www.fencemenu.com



Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

勾花护栏



Chain Link Fence

Detail drawing

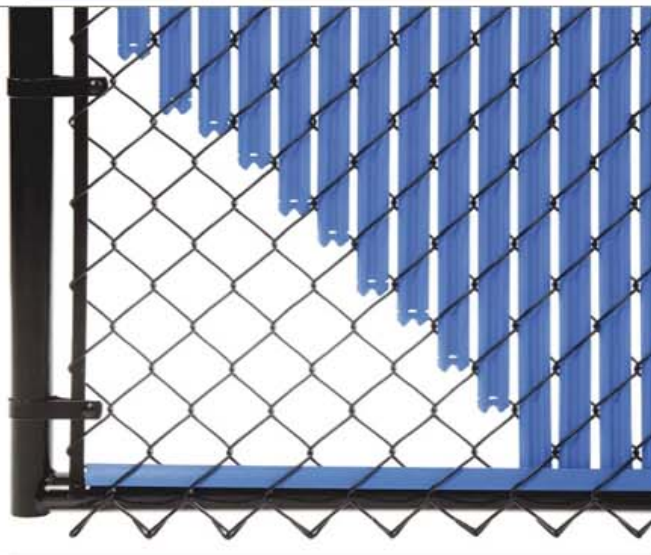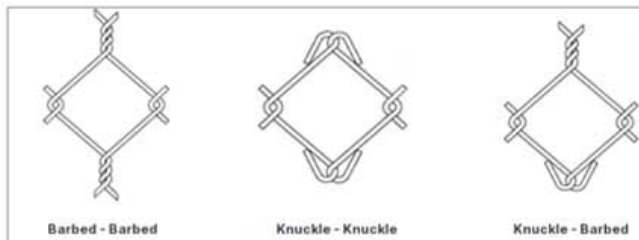

Fence & Metal Mesh

A
10

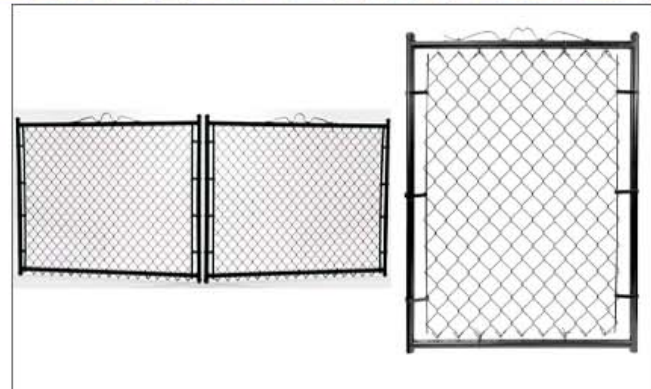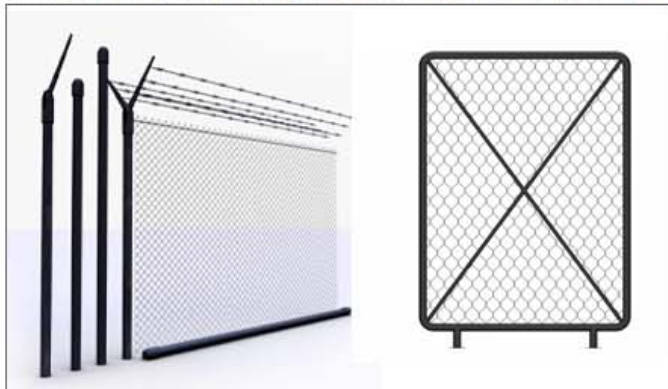

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co., Ltd

Anping Huantai Metal Products Co., Ltd.

铝艺护栏 Aluminum Fence

Colour



black



Bronze color



Brown



Dark coffee color



Dark grey



red copper color


Scene Picture



1

2

3

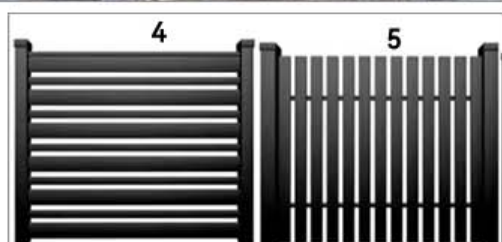

4

5



6

7

8

9



Fence & Metal Mesh

A
11

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

Specifications

specification of roll top fence			
BRC fence BRC boundary fence Roll top fence	Mesh Spacing (mm)		Wire Diameter (mm)
	Vertical wire	Horizontal wire	
Type 1	50	150	4mm,5mm,6mm,7mm,8mm
Type 2	75	300	4mm,5mm,6mm,7mm,8mm
Panel Size Height x Width (mm)	900 × 2400		Round post, * Size:48mm 60mm * Thickness:1.5mm 2.0mm 2.5mm 3.0mm (Stainless Steel U-clip & M6 Bolt 7 Nut)
	1200 × 2400	PostSpecification (mm)	
	1500 × 2400		
	1800 × 2400		
	2100 × 2400		
	2400 × 2400		Square Post, * Size:50×50mm 60×60mm,80×80mm * Thickness:1.5mm 2.0mm 2.5mm 3.0mm * Accessories : U-Clip, Bolt & Nuts, Flat Bar etc

Scene Picture



不锈钢绳网

Stainless Steel Wire Mesh

Scene Picture




Fence & Metal Mesh

A
13



X-TEND bei Herstellung
X-TEND during manufacture

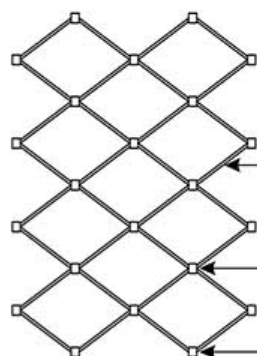


X-TEND optimal aufgespannt
X-TEND with perfect tension

Seil_Rope

Netzklemme_Mesh ferrule

Leerröhre_Loose ferrule

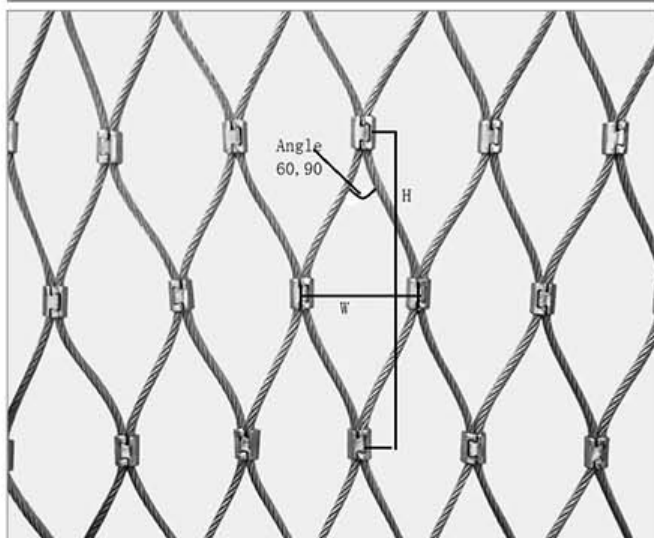

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

栅栏

Palisade Fence


Fence & Metal Mesh

A
14

Specifications

Specification of W-Section Type palisade fence						
Panel Size		W-Section Pale: 70/62/65 mm		Horizontal Rail	Post	
Height	Width	Pale thickness	Qty: Pale	Angle Steel	Square Post	I Post
1.8 m	2.75 m	2/2.5/3 mm	17 pcs	40 × 40 × 4 mm, 50 × 50 × 6 mm	60 × 60 mm, 80 × 80 mm, 100 × 100mm	100 × 55 mm
2.1 m						
2.4 m						
3.0 m						

Scene Picture

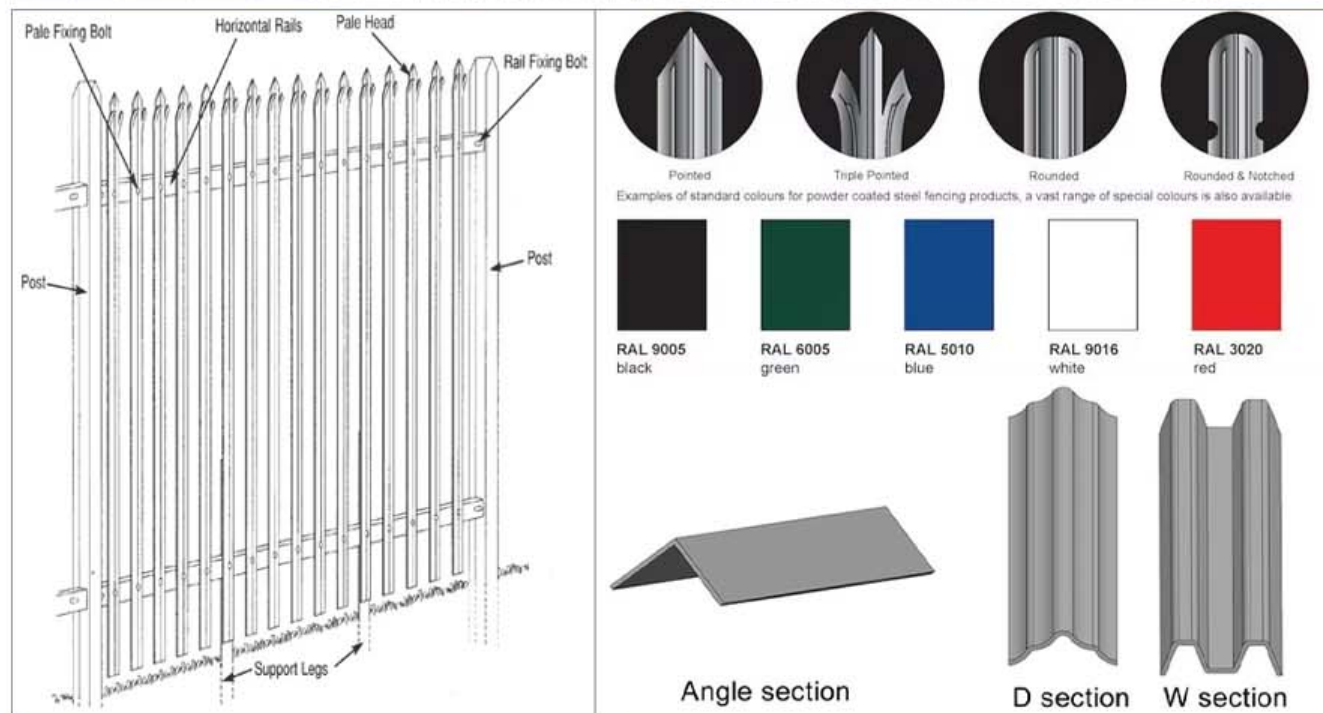

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co., Ltd

Anping Huantai Metal Products Co., Ltd.

勾花临时护栏

Chain Link Temporary Fence for USA


Fence & Metal Mesh

B
01

Specifications

Specification of construction Chain Link Fence Panels	
Fence height	4ft, 6ft, 8ft (1200mm, 1800 mm, 2400 mm)
Fence width/length	8ft, 10ft, 12ft, 14ft, etc (2400 mm, 3000 mm, 3700 mm, 4300 mm)
Wire diameter	2.7mm, 2.5mm, 3mm
Chain link mesh size	57x57mm (2-1/4"), 50x50mm, 60x60mm, etc.
Frame tube O.D	33.4mm (1-3/8"), 32mm, or 42mm (1-5/8") with 0.065" wall thickness
Vertical/cross brace tube O.D	25mm or 32mm with 1.6mm (0.065") wall thickness
Fence base/stand	610x590mm, 762x460mm, etc
Accessories	clamps, base feet, tension wire and tension bar (optional)
Material	hot dipped galvanized
Surface treatment	All joints are welded and sprayed with a galvanized paint to cover any exposed metal

Scene Picture

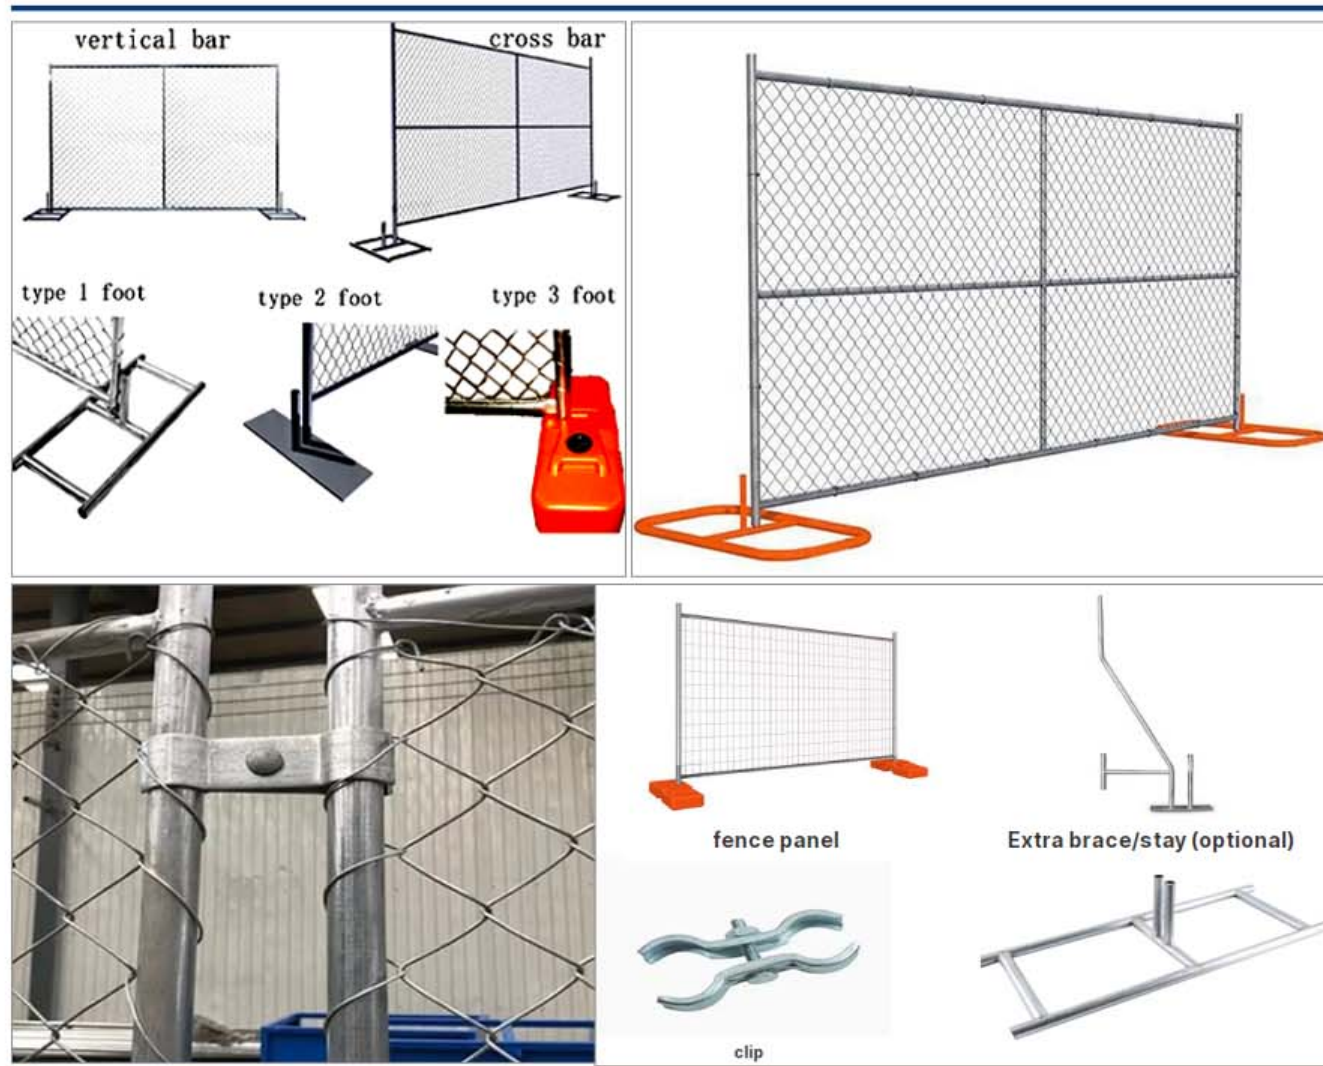

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co., Ltd

Anping Huantai Metal Products Co., Ltd.

加拿大临时护栏 Temporary Fence for Canada


Specifications

Specification of Canada temporary fence	
Wire Diameter	2.5mm,3.0mm,3.5mm,3.8mm,4.0mm,5mm
Mesh Opening (mm)	60x150mm,50x100mm,60x120mm,etc
Panel Size (H*L)	1.8x2.1m,1.8x2.4m,2.1x2.4m,2.1x2.9m,etc (6 ft x 9 ft, 6 ft x 9.5 ft, 6 ft x 10ft)
Outside Frame	25*25*1.5mm,30*30*2mm
Middle Frame	25*25*1.5mm,20*20*1.2mm
Fence feet(L*W*T)	563x89x7mm,863x89x8mm,etc
Accessories	top clip to connect two panels together
Surface treatment	powder painted,hot-dipped galvanized,pvc coated
Note: The fence can be customized according to your required if above specification is not satisfied with you	

Fence & Metal Mesh

B
02

Scene Picture

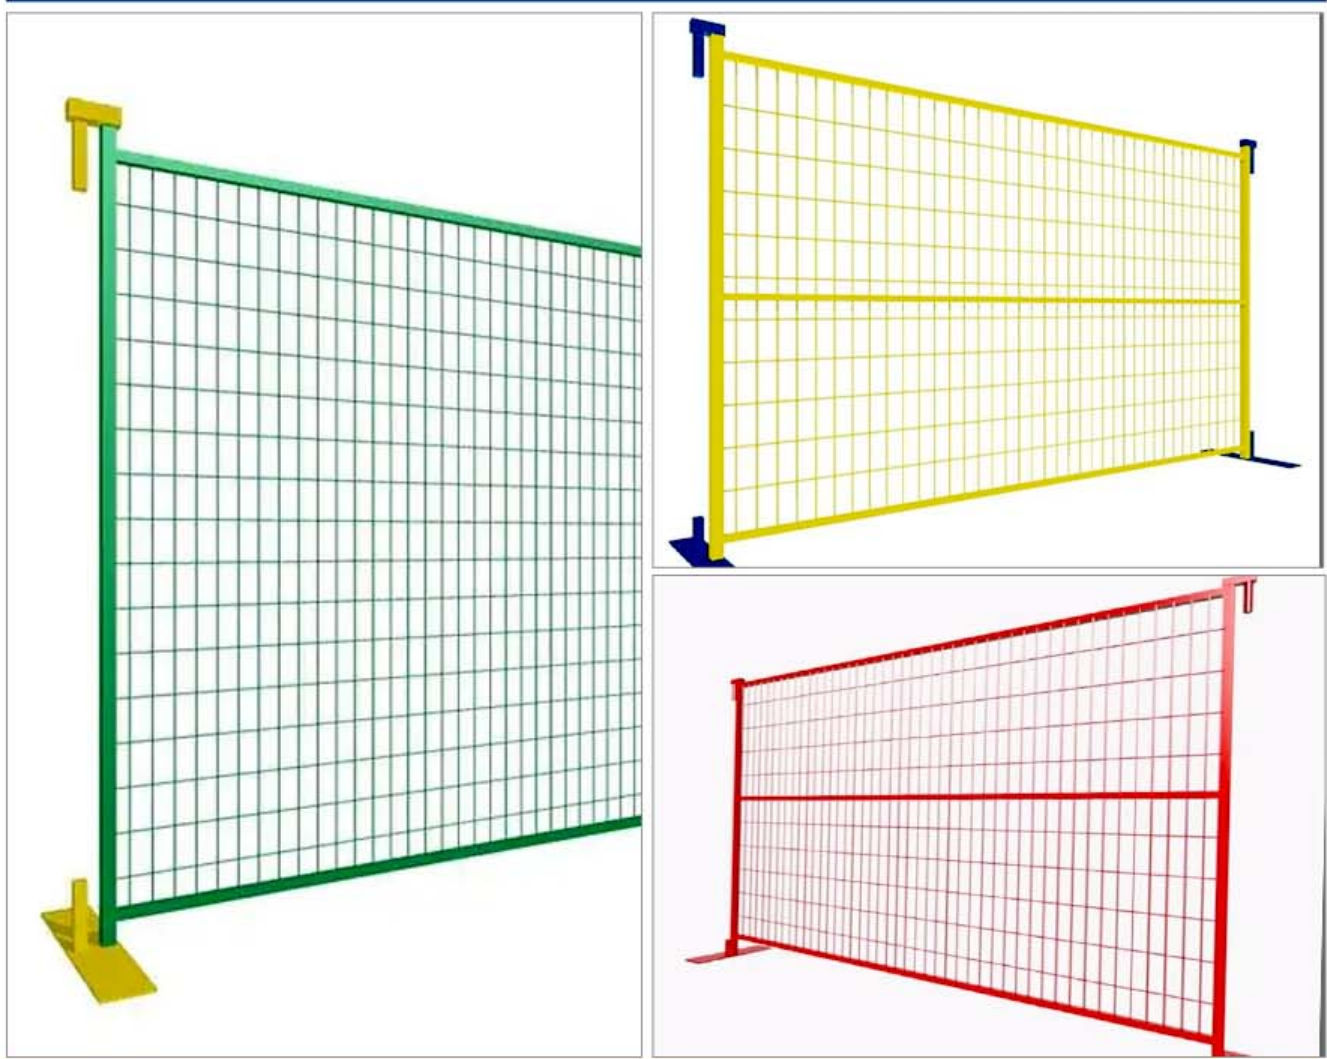

澳大利亚-新西兰临时护栏

Temporary Fence for AU/NZ

Fence & Metal Mesh

B
03

Specifications

Specification of Australia temporary fence	
Wire Diameter	2.5mm, 3.0mm, 3.5mm, 3.8mm,4.0mm,5mm
Mesh Opening (mm)	50x100mm,50x150mm,75x100mm,75x150mm,etc
Panel Size (H*L)	1.8x2.1m,1.8x2.4m,2.1x2.4m,2.1 x 2.9m,etc
Round steel Tube Panel Frame(mm)	Diameter : 32 / 38 / 40/ 42 / 48 mm Thickness: 1.2/1.5/1.6/1.8/2.0mm
Fence Stay	1500mm, 1800mm high
Plastic Feet	580*245*130mm, 600*220*150mm ,
Fence Clamp	Pitch 100 or 75
Finishing of fence	hot-dipped galvanized before welding with silver protecting on the weld jointsor hot dipped galvanized after welding
Note: The fence can be customized according to your required if above specification is not satisfied with you	

Scene Picture



A. Australia Temporary fence

Material: iron ,steel, galfan wire

Surface finish: Hot-dip galvanizing, dip-coating, spray blasting

Column: Square tube Round tube Peach column New anti-theft column Round tube is the most common



Can be used multiple times



Flexible and easy to move



Easy to install



temporaty fence connection



Email:mark@fencemenu.com

Tel:+86-15127859990

Website:www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.



铁马临时护栏

Crowd Control Barrier

Specifications

Crowd Control Barrier Common Specification	
Panel Size	1.1*2.1m, 1.1*2.2m, 1.1*2.5m, 1.2*2.5m(Or as request)
Outer Tube Size	25mm, 32mm, 38mm, 42mm, 48mm O.D
Tube Thickness	1.2,1.5, 1.8, 2.0mm)
Inner Tube Size	Tube size: 12mm, 16mm, 20mm, 25mm O.D
Tube Thickness	Tube thickness: 1.0, 1.2, 1.5mm

Scene Picture

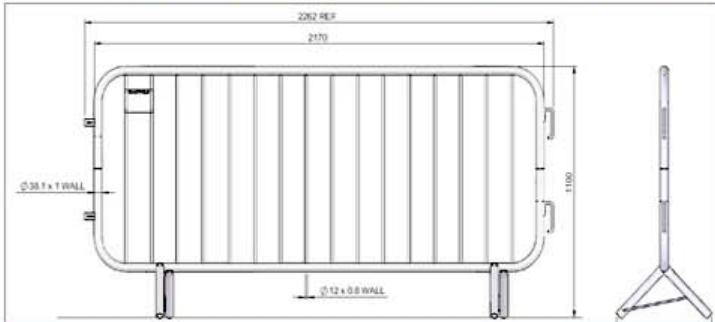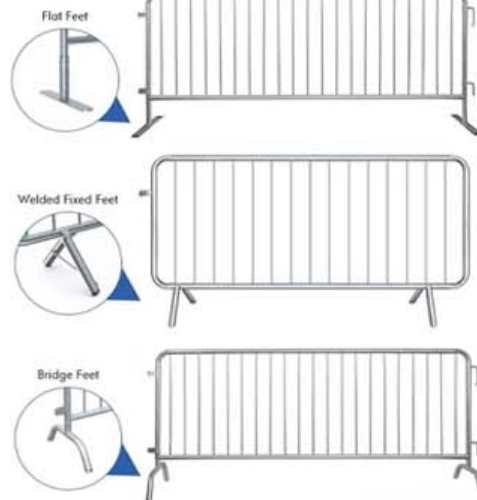

Fence & Metal Mesh

B
04

Email:mark@fencemenu.com

Tel:+86-15127859990

Website:www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

车间隔离围栏

Isolation fence

Fence & Metal Mesh

B
05

Specifications

height	wire diameter	post	mesh opening size	frame
1.2	3-4mm	1m	20*100mm 60*60mm	20*20mm 20*30mm
1.5		1.2m		
2米		1.5m 2m		

Scene Picture



Email:mark@fencemenu.com

Tel:+86-15127859990

Website:www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd



Anping Huantai Metal Products Co.,Ltd.

安全防护围栏 Edge Protection Fence

Specifications

Type	Border Wire	Mesh Wire	Length	Width	Color
Steel Mesh Barrier with Toeboard	8.0mm	5.0mm	2600mm	1150mm	RAL Series
Steel Mesh Barrier Without Toeboard	8.0mm	5.0mm	2600mm	1150mm	RAL Series
Steel Mesh Barrier Make Up	8.0mm	5.0mm	2600mm	1150mm	RAL Series
Steel Mesh Barrier 1.3M	8.0mm	5.0mm	2600mm	1150mm	RAL Series
Steel Mesh Barrier Make Up 1.3M	8.0mm	5.0mm	2600mm	1150mm	RAL Series

Scene Picture

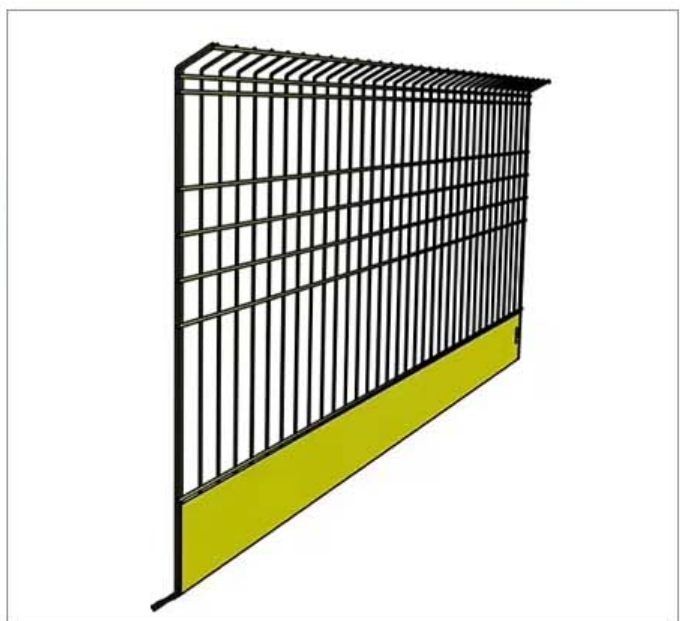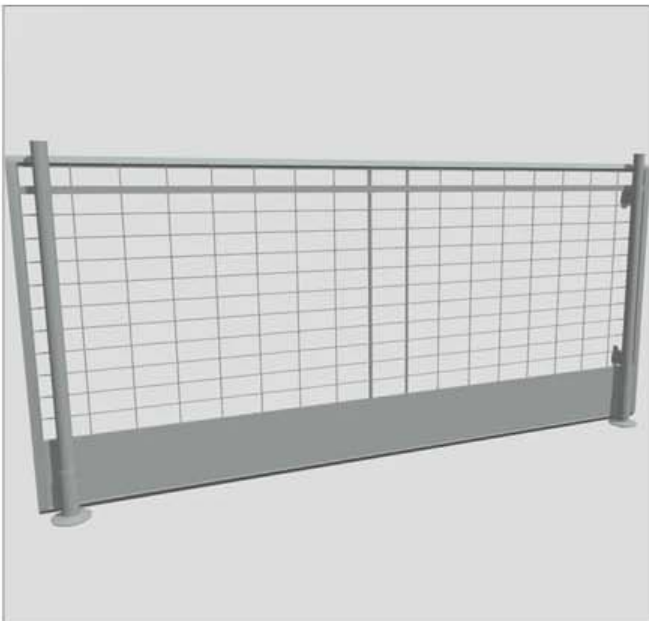

牲畜围栏 (马)

Livestock Fencing for Horse


Fence & Metal Mesh

C01

Specifications

Common Specifications of Cattle yard Panels				
Item	Rail Type	Rail size(mm)	Post size(mm)	Accessories
01	Oval	30x60	40x40 x1.6/2.0/2.5 50x50 x1.6/2.0/2.5	2 PCs bracket1 Pins
02	Oval	40x80	40x40 x1.6/2.0/2.5 50x50 x1.6/2.0/2.5	2 PCS bracket1 Pins
03	Oval	42 x115	40x40 x1.6/2.0/2.5 50x50 x1.6/2.0/2.5	2 PCs bracket1 Pins
04	Oval	30 x120	40x40 x1.6/2.0/2.5 50x50 x1.6/2.0/2.5	2 PCs bracket1 Pins
05	Square	40x40	40x40 x1.6/2.0/2.5 50x50 x1.6/2.0/2.5	2 PCS bracket1 Pins
06	Square	50x50	40x40 x1.6/2.0/2.5 50x50 x1.6/2.0/2.5	2 PCS bracket1 Pins
07	Round	32	32/42/48/60	2 PCs bracket1 Pins
08	Round	42	42/48/60	2 PCs bracket1 Pins
09	Round	48	48/60	2 PCs bracket1 Pins
10	Round	60	60	2 PCs bracket1 Pins
Material: hot dipped galvanized steel tube.Zinc thickness: 15 microns.				
Panelsize:16x21 m(5 rails); 1.8 x 21 m (6 rails); 1.8 x 3 m (6 rails)				

Scene Picture

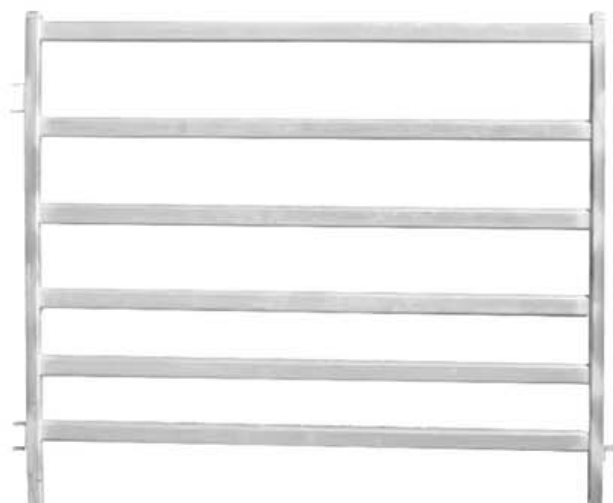

Email:mark@fencemenu.com

Tel:+86-15127859990

Website:www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd



Anping Huantai Metal Products Co.,Ltd.

牲畜围栏 (牛) Livestock Fencing for Cattle

Specifications

Round tube cattle panel		Name	Wholesale Heavy duty 6.12ft 6.10ft galvanized livestock cattle panel used corral panels
Height*Length	1m*2.1m, 1m*2.9m, 1.8m*2.1m	Material	Hot-dip galvanized Steel Pipe or Square Tube
Horizontal rails	32mm OD, 42mm OD, (6 round rail)	Finish	Galvanized or Powder coating
Vertical pipe	32mm OD, 42mm OD	Height x Length	1700mm/1800mm x 2400mm/3000mm/3600mm
Thickness	1.6mm, 2.0mm	Vertical Pipe (Square Pipe)	40mm*40mm*1.6/1.8mm Thickness 50mm*50mm*1.6/1.8mm Thickness 30mm*60mm*1.6/1.8mm Thickness 40mm*80mm*1.6/1.8mm Thickness
Material	pre hot dipped galvanized steel pipe	Horizontal Rails (Round Tube)	32mm O.D. 1.6/1.8/2.0mm Thickness 38mm O.D. 1.6/1.8/2.0mm Thickness 42mm O.D. 1.6/1.8/2.0mm Thickness 48mm O.D. 1.6/1.8/2.0mm Thickness
Accessories	4 lugs, 2 rain caps are welded on panel 2 pins are included in 1 panel	Length	2.1m/ 2.3m/ 2.4m/ 2.6m or more
		Height	1.6m/ 1.7m/ 1.8m or more
		Welding	Fully welded post brackets
		Welds	Bull bars are fully welded.

Scene Picture

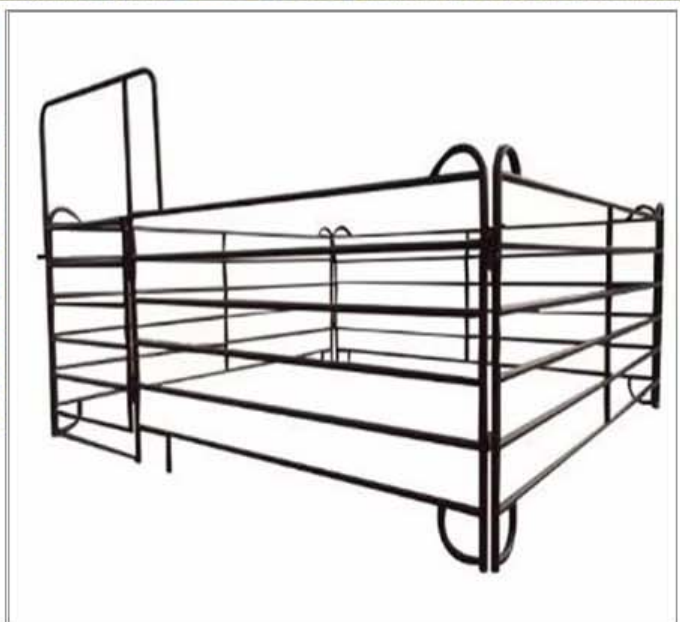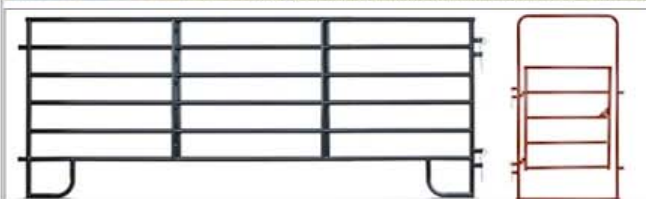

牲畜围栏 (羊)

Livestock Fencing for Sheep

Fence & Metal Mesh

C03

Specifications



1.12m H x 2.1m L Sheep Panels

Size: 1112mm(H) x 2100mm (W)

Vertical pipe: 40mm x 40mm stiles, 1.6mm Thick

Horizontal rail: 30mm x 60mm rail, 1.6mm thick x 6 Oval

1.12m H X 2.1m L Sheep Gates

Size: 1112mm(H) x 2100mm (W)

Vertical pipe: 40mm x 40mm stiles, 1.6mm Thick

Horizontal rail: 30mm x 60mm rail, 1.6mm thick x 6 Oval

Scene Picture



Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com


Anping County Qunli Silk Screen Manufacturing co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

Specifications

Wire Diameter	1.8-2.5mm (Inner wire)	1.8-3.5mm (outer wire)
Length Of The Roll	165 inch(50m) or 330 inch(100m)	
Width Of The Roll	0.8m,0.9m,1.0m,1.1m,1.2m,1.5m,1.8m,2m,2.4m	
Surface Treatment	class A:hot dipped galvanized (zinc coated 220-260g/m ²) class B:hot dipped galvanized(zinc coated 60-70g/m ²) class C:electro galvanized(zinc coated 15-20g/m ²)	

Scene Picture

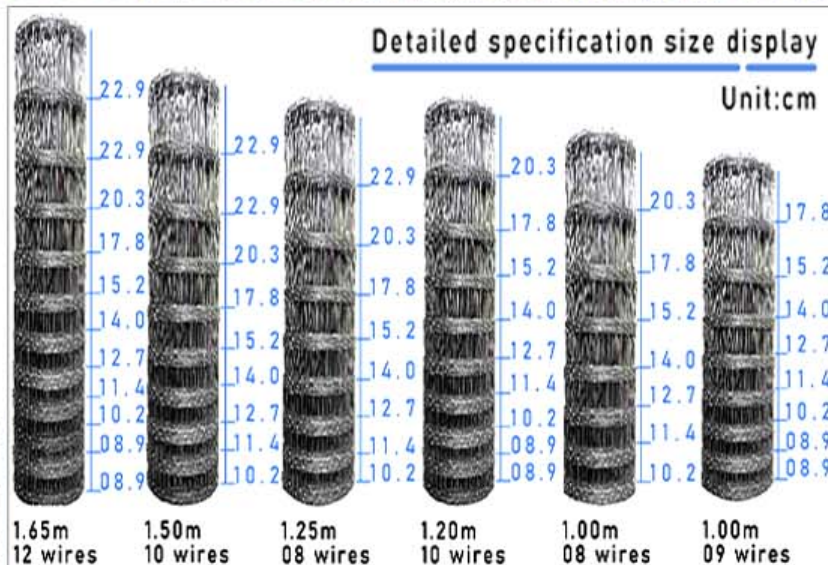

六角网

Metal Hexagonal Wire Mesh



Fence & Metal Mesh

C05

Specifications

Item	Mesh opening		Wire Gauge (BWG)	Height	
CK100	3/8"	10 mm	27, 26, 25, 24, 23	1 m	3'
CK101	1/2"	13 mm	25, 24, 23, 22, 21	2 m	6'
CK102	5/8"	16 mm	27, 26, 25, 24, 23, 22	2 m	6'
CK103	3/4"	20 mm	25, 24, 23, 22, 21, 20, 19	2 m	6'
CK104	1"	25 mm	25, 24, 23, 22, 21, 20, 19, 18	2 m	6'
CK105	1-1/4"	31 mm	23, 22, 21, 20, 19, 18	2 m	6'
CK106	1-1/2"	40 mm	23, 22, 21, 20, 19, 18	2 m	6'
CK107	2"	50 mm	23, 22, 21, 20, 19, 18	2 m	6'
CK108	2-1/2"	65 mm	21, 20, 19, 18	2 m	6'
CK109	3"	75 mm	20, 19, 18, 17	2 m	6'
CK110	4"	100 mm	19, 18, 17, 16	2 m	6'

Scene Picture

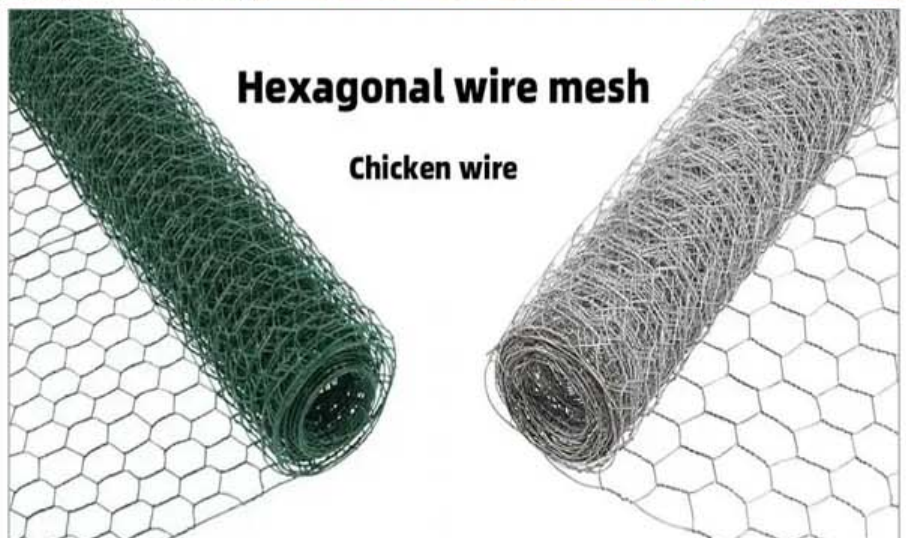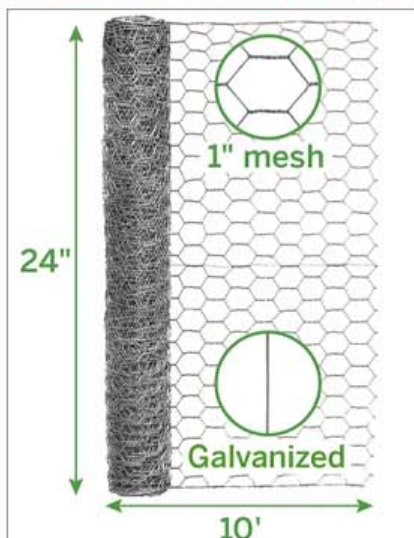

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd


Anping Huantai Metal Products Co.,Ltd.

introduce

Crimped wire mesh is mainly divided into two types: light - duty and heavy - duty. Light - duty crimped wire mesh is mainly applied to agricultural breeding and protection. Heavy - duty crimped wire mesh is mainly used in building materials or industry, such as mineral screening. Both the wire diameter and mesh size can be customized


Specifications

Weaving Types




Double Crimp Wire Mesh

Double crimp wire mesh is manufactured with pre-crimped wires to obtain precise screening apertures and achieve maximum rigidity. Generally, it works well in conditions where materials are not sticky or materials with a small tendency to peg or wedge.

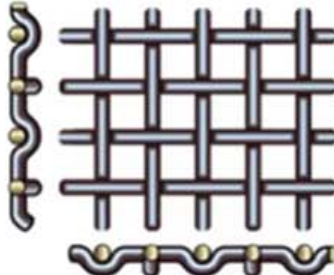



Flat Top Wire Mesh

Flat top wire mesh is manufactured with wires crimped on one side only to create a flat surface, thus enhancing its durability and allowing bigger apertures with high precision. It is generally used for coarse mineral screening.

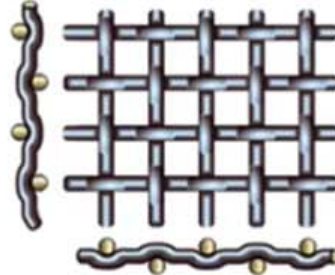

Lock Crimp Wire Mesh

Before weaving, both warp and weft wires are pre-crimped. Lock Crimp Wire Mesh is characterized by the formation of bumps or joints on each group of intersecting wires. These joints lock the mesh in place and create an extremely rigid product.

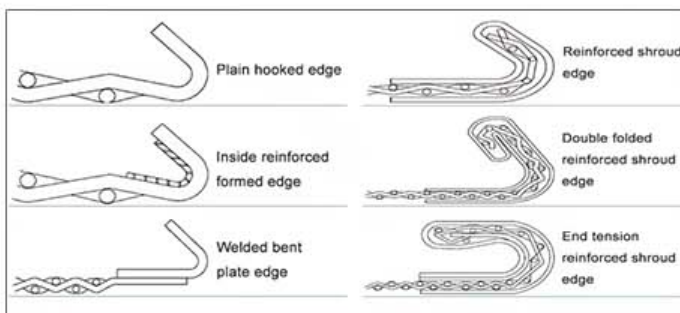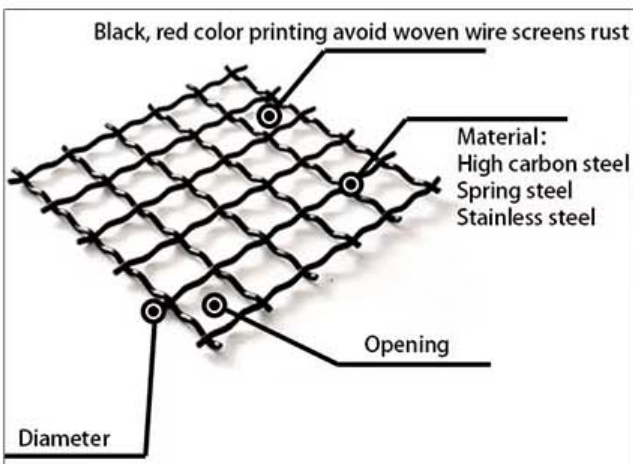


轧花网

Steel Crimped Wire Mesh

Fence & Metal Mesh

C
07

Detail drawing

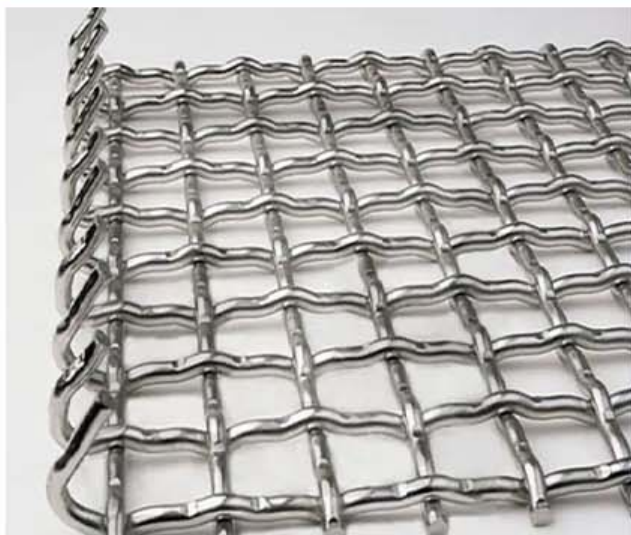

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com


Anping County Qunli Silk Screen Manufacturing Co., Ltd

Anping Huantai Metal Products Co., Ltd.

Specifications

Specification of chain link fence									
Opening	1"	1.5"	2"	2-1/4"	2-3/8"	2-1/2"	2-5/8"	3"	4"
Wire Diameter	25mm	40mm	50mm	57mm	60mm	64mm	67mm	75mm	100mm
	18Ga - 13Ga	16Ga-8Ga						18Ga-7Ga	
	1.2- 2.4mm	1.6mm-4.2mm						2.0mm-5.0mm	
H=1.63m									
Length of Roll	0.5m-100m(or more)								
Width of Roll	0.5m-5m								
Surface treatment	Hot dipped galvanized or PVc coated								
Material and specification can be made according to customers' detailed requirements									

The edge of chain link fence

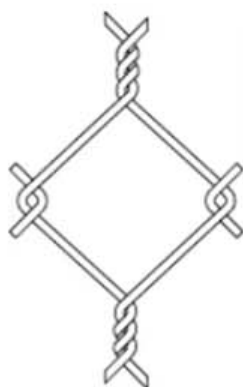



Barbed - Barbed



Knuckle - Knuckle



Knuckle - Barbed

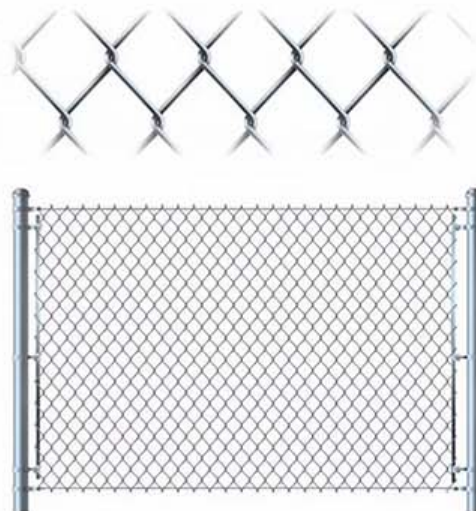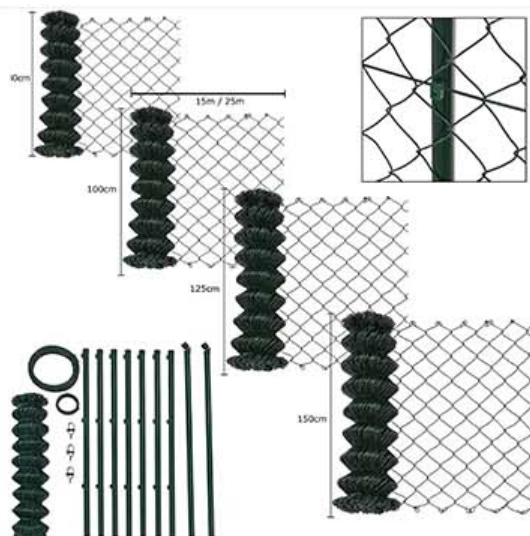

勾花网

Chain Link Fence

Fence & Metal Mesh
09

Scene Picture



Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

石笼网 Gabion Box/Mesh



Specifications

specification of Factory Suppliers Hexagon Gabion basket for Seawall Protection			
Gabion size(m)	Mesh opening	Wire diameter	Surface treatment
2×1×0.5	60×80mm	2.2-4.0mm	Galvanized PVC coated
2×1×1.0	80×100mm	2.2-4.0mm	
	80×120mm		
3×1×0.5	100×120mm	2.2-4.0mm	
3×1×1.0	120 × 150mm	2.2-4.0mm	
4×1×1.0		2.2-4.0mm	
6×1×1.0		2.2-4.0mm	
Material	High quality steel wire		
Gabion height type	Gabion box and gabion mattress.		
Application	* Erosion protection. * Roadway and bridge protection. * Gravity retaining wall. * Slope paving and weirs. * Riverbank controlling.		
All sizes can customized according to your request			

Fence & Metal Mesh

D01

Scene Picture

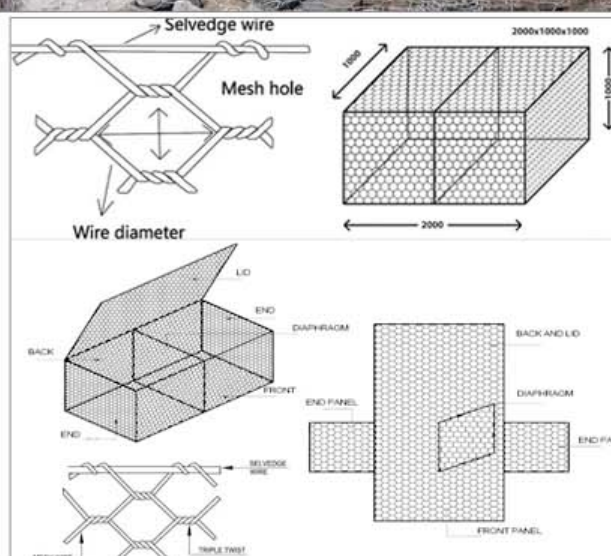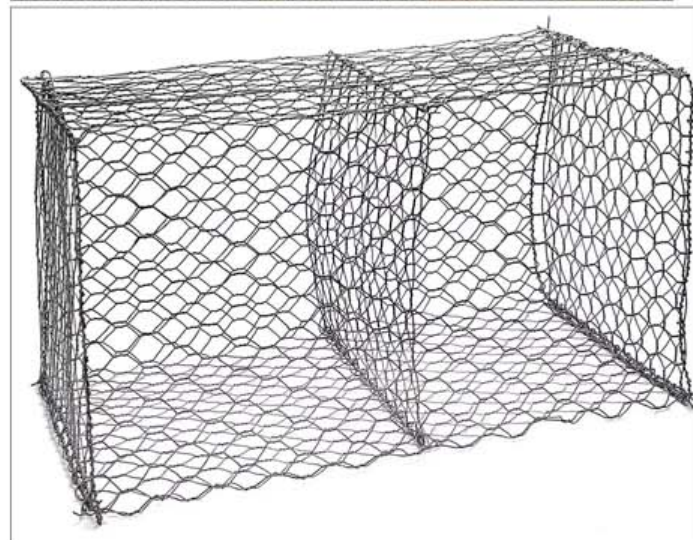

焊接石笼网

Welded Gabion Fence

Fence & Metal Mesh

Specifications

specification of Welded Gabion			
Gabion size(m)	Mesh opening	Wire diameter	Surface treatment
1×1×1	50 × 50mm 75 × 75mm 80 × 80mm 100 × 100mm	3-6mm	Galvanized Galfan PVC coated
2×1×1		3-6mm	
3×1×1		3-6mm	
0.5×0.5×0.5		3-6mm	
1×0.5×0.5		3-6mm	
1×1×0.5		3-6mm	
2×1×0.5		3-6mm	

Scene Picture



Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

Specifications

Opening		Wire Diameter		
In inch	In metric unit			
1/4" x 1/4"	6.4 × 6.4mm	BWG24-22	Width 0.4-2M Length 5-50m	electric galvanized before welded, electric galvanized after welded, hot-dipped galvanized before welded, hot-dipped galvanized after welded, PVC coated, Stainless steel wire
3/8" x 3/8"	10.6× 10.6mm	BWG22-19		
1/2" x 1/2"	12.7 × 12.7mm	BWG23-16		
5/8" x 5/8"	16× 16mm	BWG21-18		
3/4" x 3/4"	19.1 × 19.1mm	BWG21-16		
1" x 1/2"	25.4× 12.7mm	BWG21-16		
1-1/2" x 1-1/2"	38 × 38mm	BWG19-14		
1" x 2"	25.4 × 50.8mm	BWG16-14		
2" x 2"	50.8 × 50.8mm	BWG15-12		
2" x 4"	50.8 × 101.6mm	BWG15-12		
4" x 4"	101.6 × 101.6mm	BWG15-12		
4" x 6"	101.6 × 152.4mm	BWG15-12		
6" x 6"	152.4 × 152.4mm	BWG15-12		
6" x 8"	152.4 × 203.2mm	BWG14-12		
Note: Special specifications can be made according to customers requires. inquiry us!				

Scene Picture

冲孔网


Perforated Metal Mesh

Fence & Metal Mesh

Specifications

Our Products	Perforated metal mesh
Size	1) Thickness: 0.3mm-12mm 2) Mesh Length: 1.8m - 2.44m 3) Mesh Width: 0.8m - 1.22m 4) Perforated area percent: from 7% to 83%
Hole forms	Diamond, round, square, triangle, hexagon ect
Surface Treatment	Electric galvanized, Hot dipped galvanized, PVC coated, oxidation treatment etc
Characteristics	Corrosion resistance, ageing resistance, durable, etc.
Packing	1.LCL: packed with plastic film then on the pallets 2.FCL: Nude packing 3.Other special package according to customers' requirements.

Scene Picture

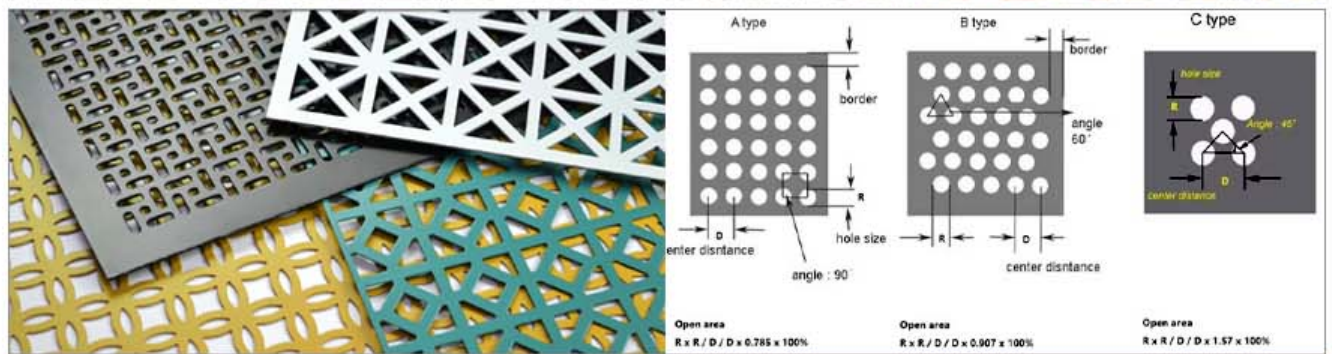

Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

冲孔网


Perforated Metal Mesh

Detail drawing



Fence & Metal Mesh

D
05

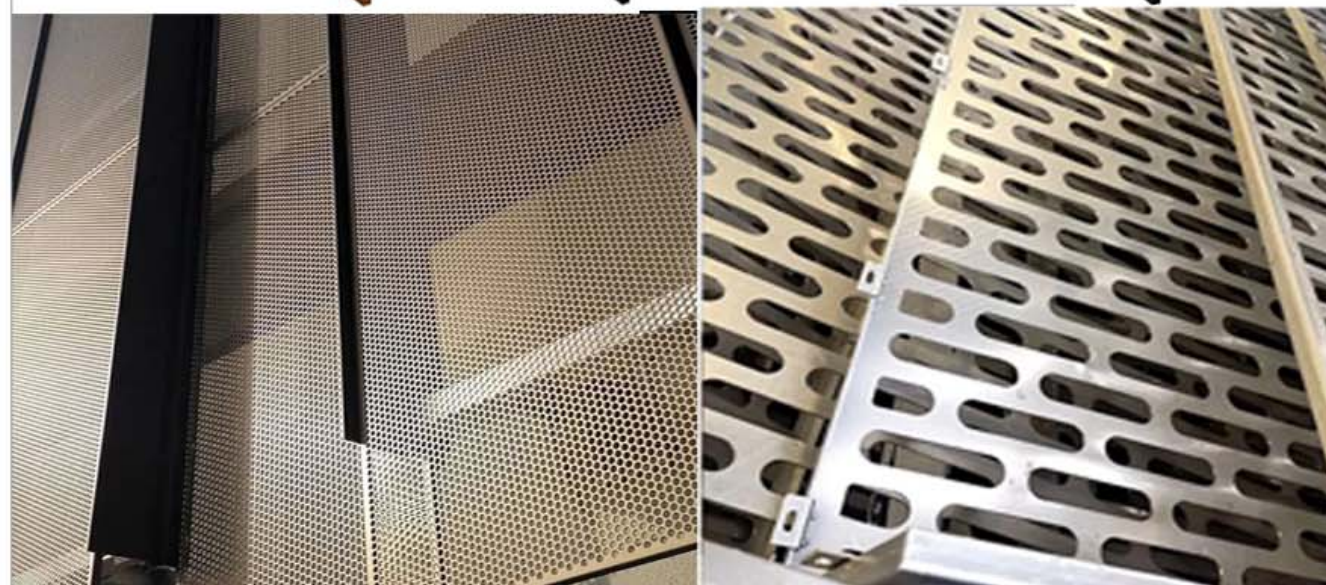

Email: mark@fencemenu.com






Tel: +86-15127859990

Website: www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co., Ltd

Anping Huantai Metal Products Co., Ltd.

Scene Picture

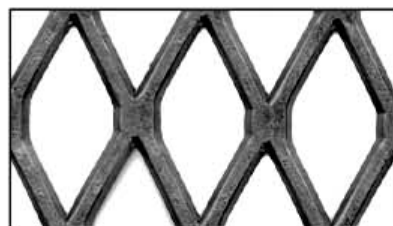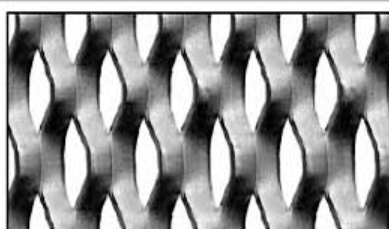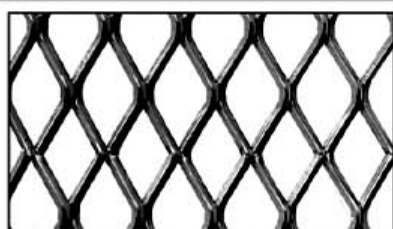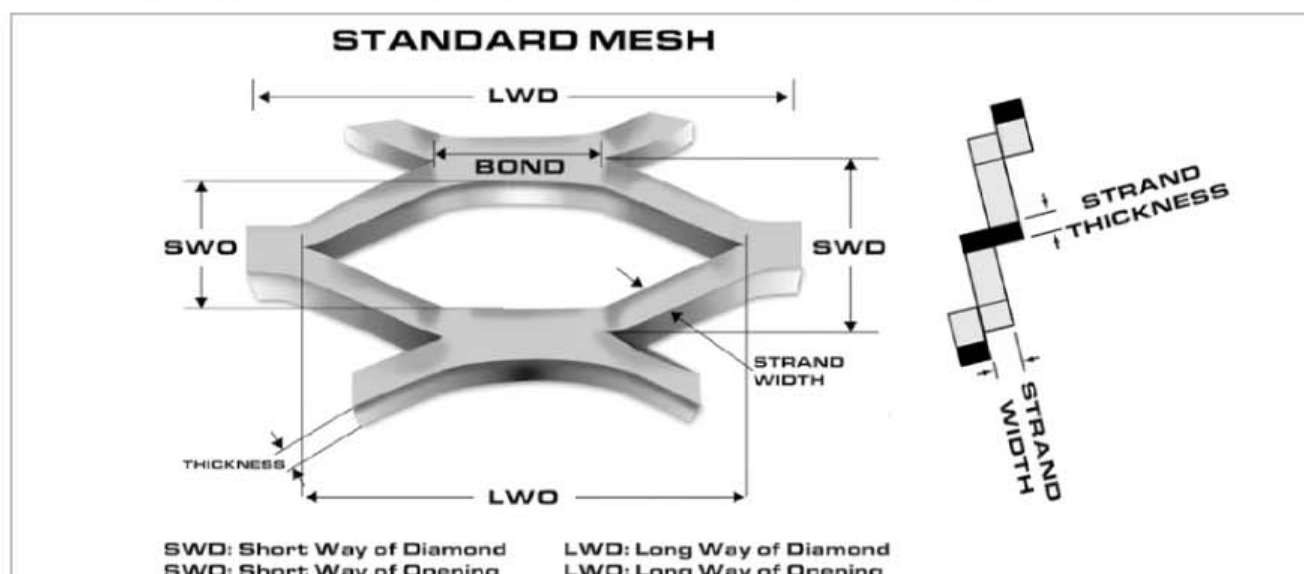

Specifications

Remarks: Special Material, High Zinc Coating and New Style can be Customized.	
Material Standard	ASTM A36, A1011, A569, Q235, S275JR, Stainless steel 304/316, Mild steel & Low carbon steel, etc
Bearing Bar (Width x Thickness)	25×3, 25×4, 25×4.5, 25×5, 30×3, 30×4, 30×4.5, 30×5, 32×5, 40×5, 50×5, 65×5, 75×6, 75×10.....100 ×10mm etc; I bar: 25×5×3, 30×5×3, 32×5×3, 40×5×3 etc US standard: 1"x3/16", 1 1/4"x3/16", 1 1/2"x3/16", 1"x1/4", 1 1/4"x1/4", 1 1/2"x1/4", 1"x1/8", 1 1/4"x1/8", 1 1/2"x1/8" etc
Bearing Bar Pitch	12.5, 15, 20, 23.85, 25, 30, 30.16, 30.3, 32.5, 34.3, 35, 38.1, 40, 41.25, 60, 80mm etc. US standard: 19-w-4, 15-w-4, 11-w-4, 19-w-2, 15-w-2 etc.
Twisted Cross Bar Pitch	38.1, 50, 60, 76, 80, 100, 101.6, 120mm, 2" & 4" etc
Surface Treatment	Untreated(black), Hot-dipped galvanized, Powder coated, Electroplate, Painting or as per customers' requirement.
Grating Style	Plain / Smooth, Serrated / Teeth, I bar, Serrated I bar
Packing	(1) Bandage and Paperboard: Generally applies to neat steel plate; (2) Screw Locking Method: Use 4 screw rods through the aperture of the steel grid, for high strength; (3) Steel Pallet: Traditional export packing.

Scene Picture



Swaged Pressure Locked:

Assembled by inserting pre-punched bearing and cross bars into an "egg-crate" configuration and deforming the cross bars under intense hydraulic pressure. Available in all materials and ideal for architectural and ornamental applications.



Welded Swaged Pressure Locked:

It is an upgraded version of the swaged pressure locked. Each intersection is manually welded once to make it stronger and can withstand more loads.



Welded Grating:

The most commonly used and economical design suitable for most industrial applications. Manufactured by welding the bearing bar and cross bar intersection, typically with automated forge welding equipment or professional manual welding. Available in carbon steel or stainless steel.



Dovetail Pressure Locked:


Insert the cross bar into the pre-punched bearing bar and hydraulically deform it to lock it in place. The cross bar here is usually a straight plate shaped like a bearing bar.

Specifications

Noise Barrier specifications and technical parameters

Size	Performance and testing project	Test Standards	Test Results
Length: can be customized Height: 500mm Thickness:30mm-140mm	Noise Reduction Coefficient	GBJ47-83	NRC 0.84 above
	Fire rating	GB/T13350-2000	A Level(Noncombustible)
	Insulation	GB/T13350-92	s0.042VV(M.K)
	Soundproofing	GB/T13350-2008	z30db
	Sound absorption coefficient	GB/T13350-2008	>0.863

Scene Picture


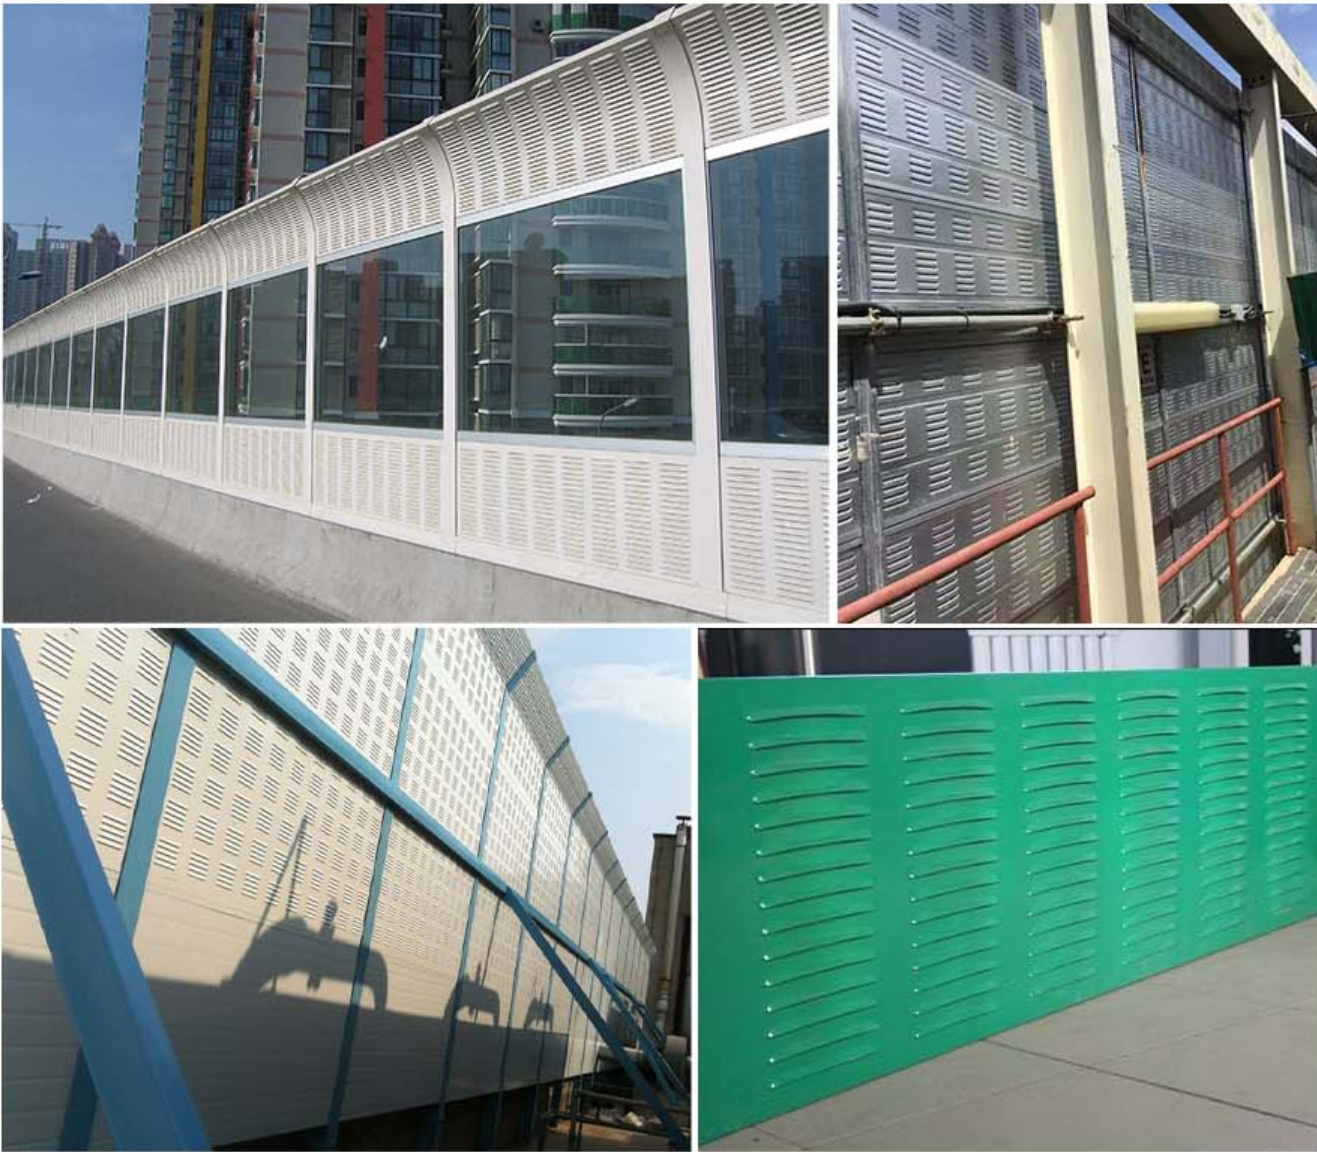


安全防护围栏 Edge Protection Fence

Specifications

Type	Border Wire	Mesh Wire	Length	Width	Color
Steel Mesh Barrier with Toeboard	8.0mm	5.0mm	2600mm	1150mm	RAL Series
Steel Mesh Barrier Without Toeboard	8.0mm	5.0mm	2600mm	1150mm	RAL Series
Steel Mesh Barrier Make Up	8.0mm	5.0mm	2600mm	1150mm	RAL Series
Steel Mesh Barrier 1.3M	8.0mm	5.0mm	2600mm	1150mm	RAL Series
Steel Mesh Barrier Make Up 1.3M	8.0mm	5.0mm	2600mm	1150mm	RAL Series

Scene Picture

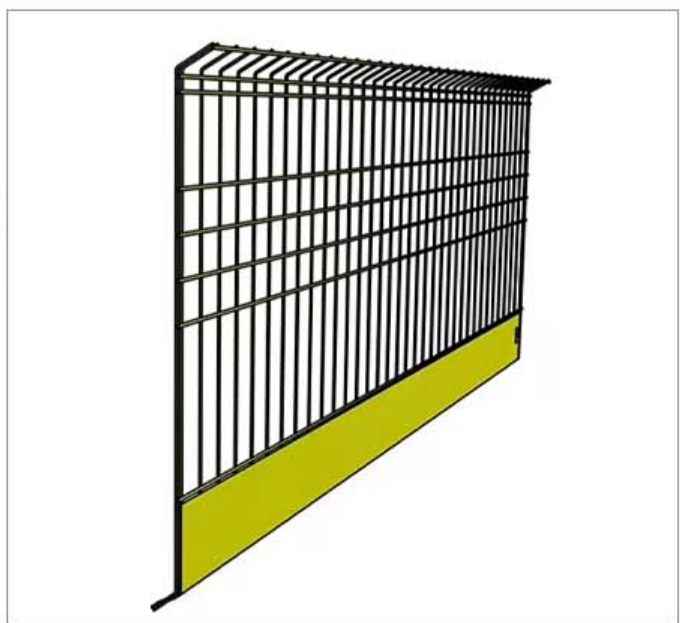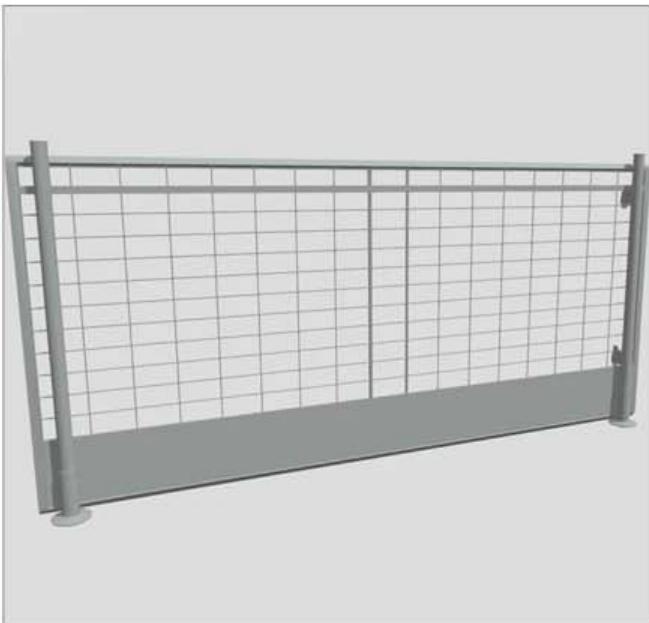

窗纱

Window screen

Fence & Metal Mesh

D
10

Scene Picture



**KEEP THE MOSQUITOES
AND INSECTS OUT**



Email: mark@fencemenu.com

Tel: +86-15127859990

Website: www.fencemenu.com




Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.

装饰网

Decorative mesh

Scene Picture

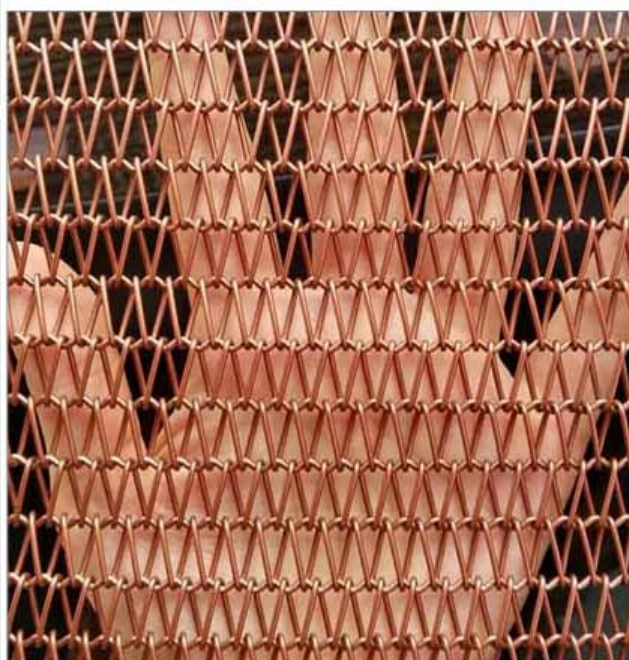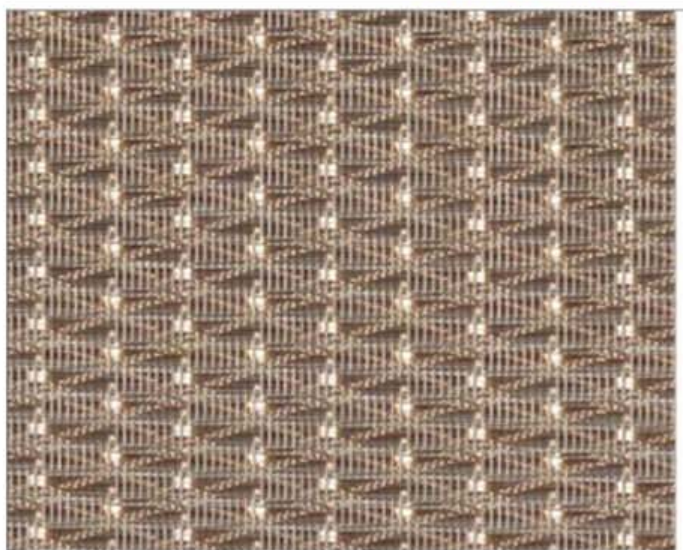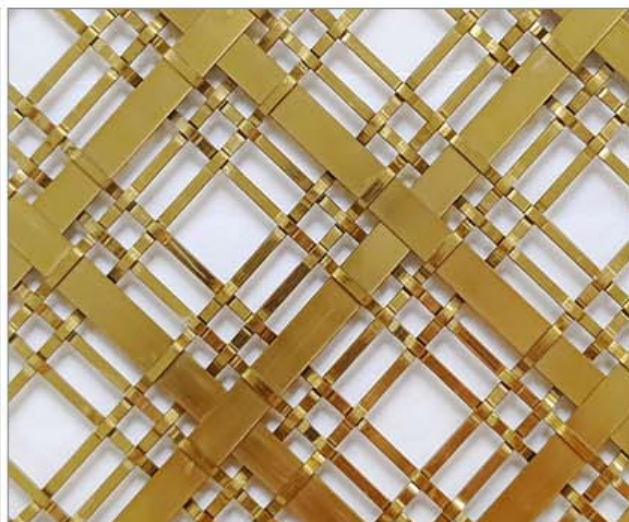

Fence & Metal Mesh

D
11

墙面收纳板

Wall-mounted storage board

Fence & Metal Mesh

D
12

Specifications

NAME	PARAMETER
SIZE	28*28CM 38*56CM 56*56CM 56*76CM 30*40CM 40*60CM 60*80CM 50*100CM All sizes can be custom-made
MATERIAL	Stainless steel, steel iron, aluminium
HOLE SHAPE	Elliptical hole, Round hole, Cross-shaped hole, All sizes can be custom-made
SURFACE TREATMENT	Powder Coated



Email:mark@fencemenu.com

Tel:+86-15127859990

Website:WW.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd


Anping Huantai Metal Products Co.,Ltd.

刺绳 barbed wire

Specifications

Type	Wire Gauge (SWG)		Barb Distance (cm)	Barb Length (cm)
Electric Galvanized Barbed wire; Hot-dip zinc plating barbed wire; Stainless barbed wire;	10# x 12#		7.5-15	1.5-3.0
	12# x 12#			
	12# x 14#			
	14# x 14#			
	14# x 16#			
	16# x 16#			
	16# x 18#			
PVC coated barbed wire; PE barbed wire;	before coating	after coating	7.5-15	1.5-3.0
	1.0mm-3.5mm	1.4mm-4.0mm		
	BWG11#-20#	BMG8#-17#		
	SWG11#-20#	SWG8#-17#		
	PVC PE coating thickness:0.4mm-0.6mm; different colors of length are available at customers request			

Scene Picture



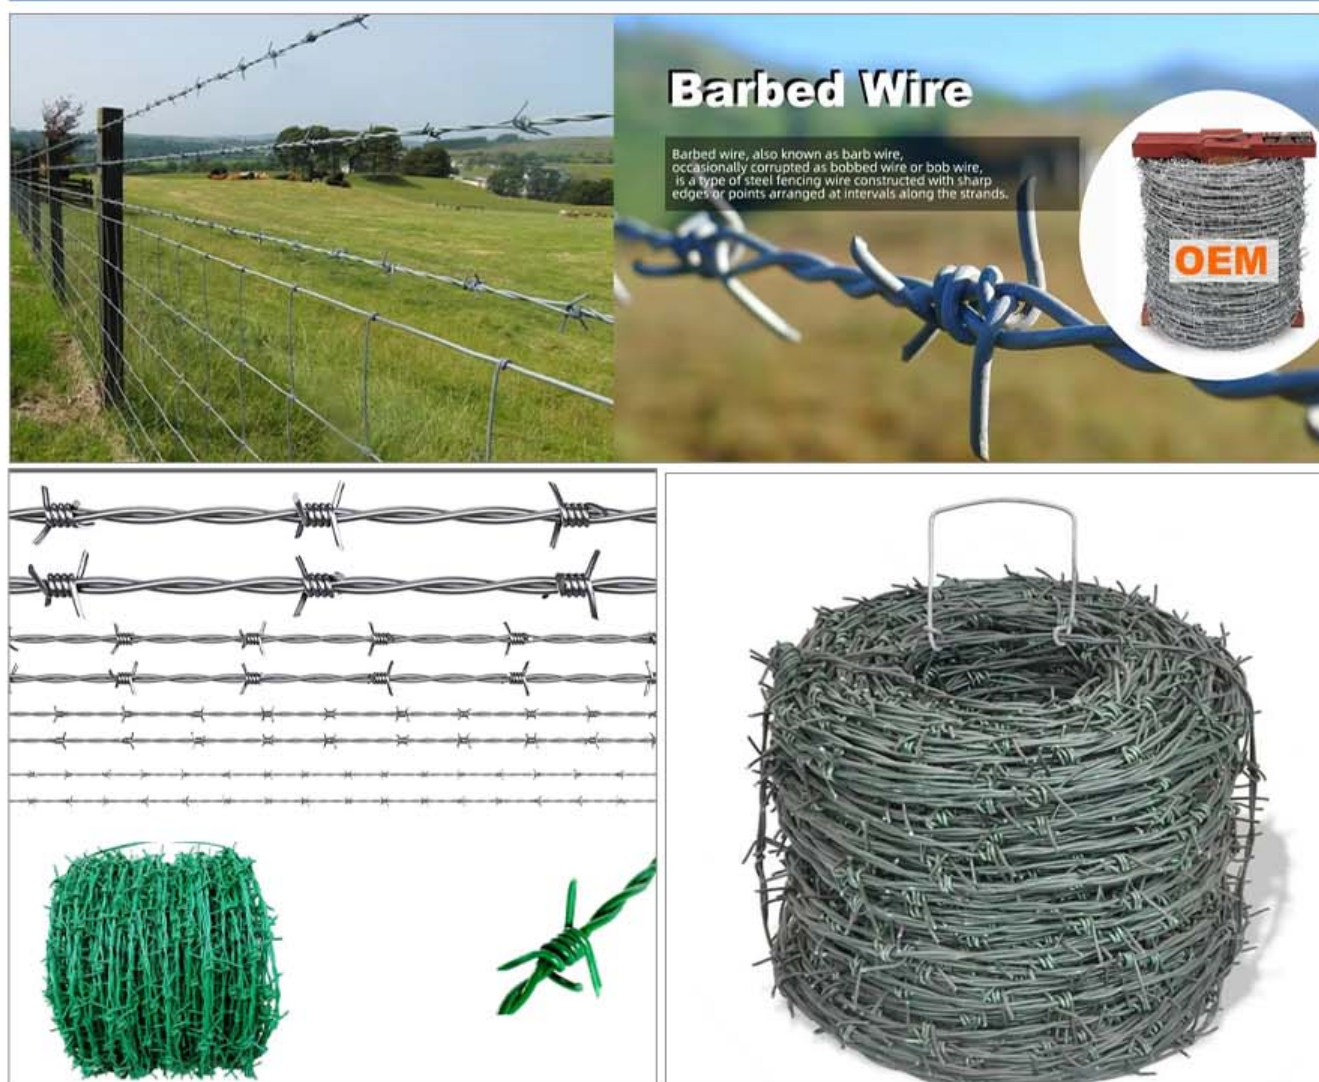


刀片刺绳

razor wire

Fence & Metal Mesh
E02

Specifications

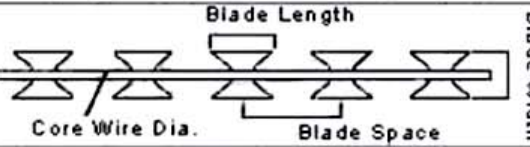Reference Number	Blade Style	Thickn ess	Wire Dia	Bard Length	Bard width	Bard spacing
BTO-10		0.5 ± 0.05	2.5 ± 0.1	10 ± 1	13 ± 1	26 ± 1
BTO-12		0.5 ± 0.05	2.5 ± 0.1	12 ± 1	15 ± 1	26 ± 1
BTO-18		0.5 ± 0.05	2.5 ± 0.1	18 ± 1	15 ± 1	33 ± 1
BTO-22		0.5 ± 0.05	2.5 ± 0.1	22 ± 1	15 ± 1	34 ± 1
BTO-28		0.5 ± 0.05	2.5	28	15	45 ± 1
BTO-30		0.5 ± 0.05	2.5	30	18	45 ± 1
CBT-60		0.6 ± 0.05	2.5 ± 0.1	60 ± 2	32 ± 1	100 ± 2
CBT-65		0.6 ± 0.05 0	2.5 ± 0.1	65 ± 2	21 ± 1	100 ± 2

Scene Picture



Email:mark@fencemenu.com

Tel:+86-15127859990

Website:www.fencemenu.com

Anping County Qunli Silk Screen Manufacturing Co.,Ltd

Anping Huantai Metal Products Co.,Ltd.


防爆网 Defensive Barrier

Specifications

Specification of Defensive Bastion Barrier	
Mesh Size	50 × 50 mm, 75 × 75 mm, 76.2 × 76.2 mm, 50 × 100 mm, 100 × 100 mm, etc.
Wire Diameter	4.0mm/5.0mm
Material	hot-dipped galvanized steel wire or zinc-aluminum alloy steel wires
Geotextile	300g/m ²
Geotextile color	White, beige, Green and other customized colors.

Scene Picture



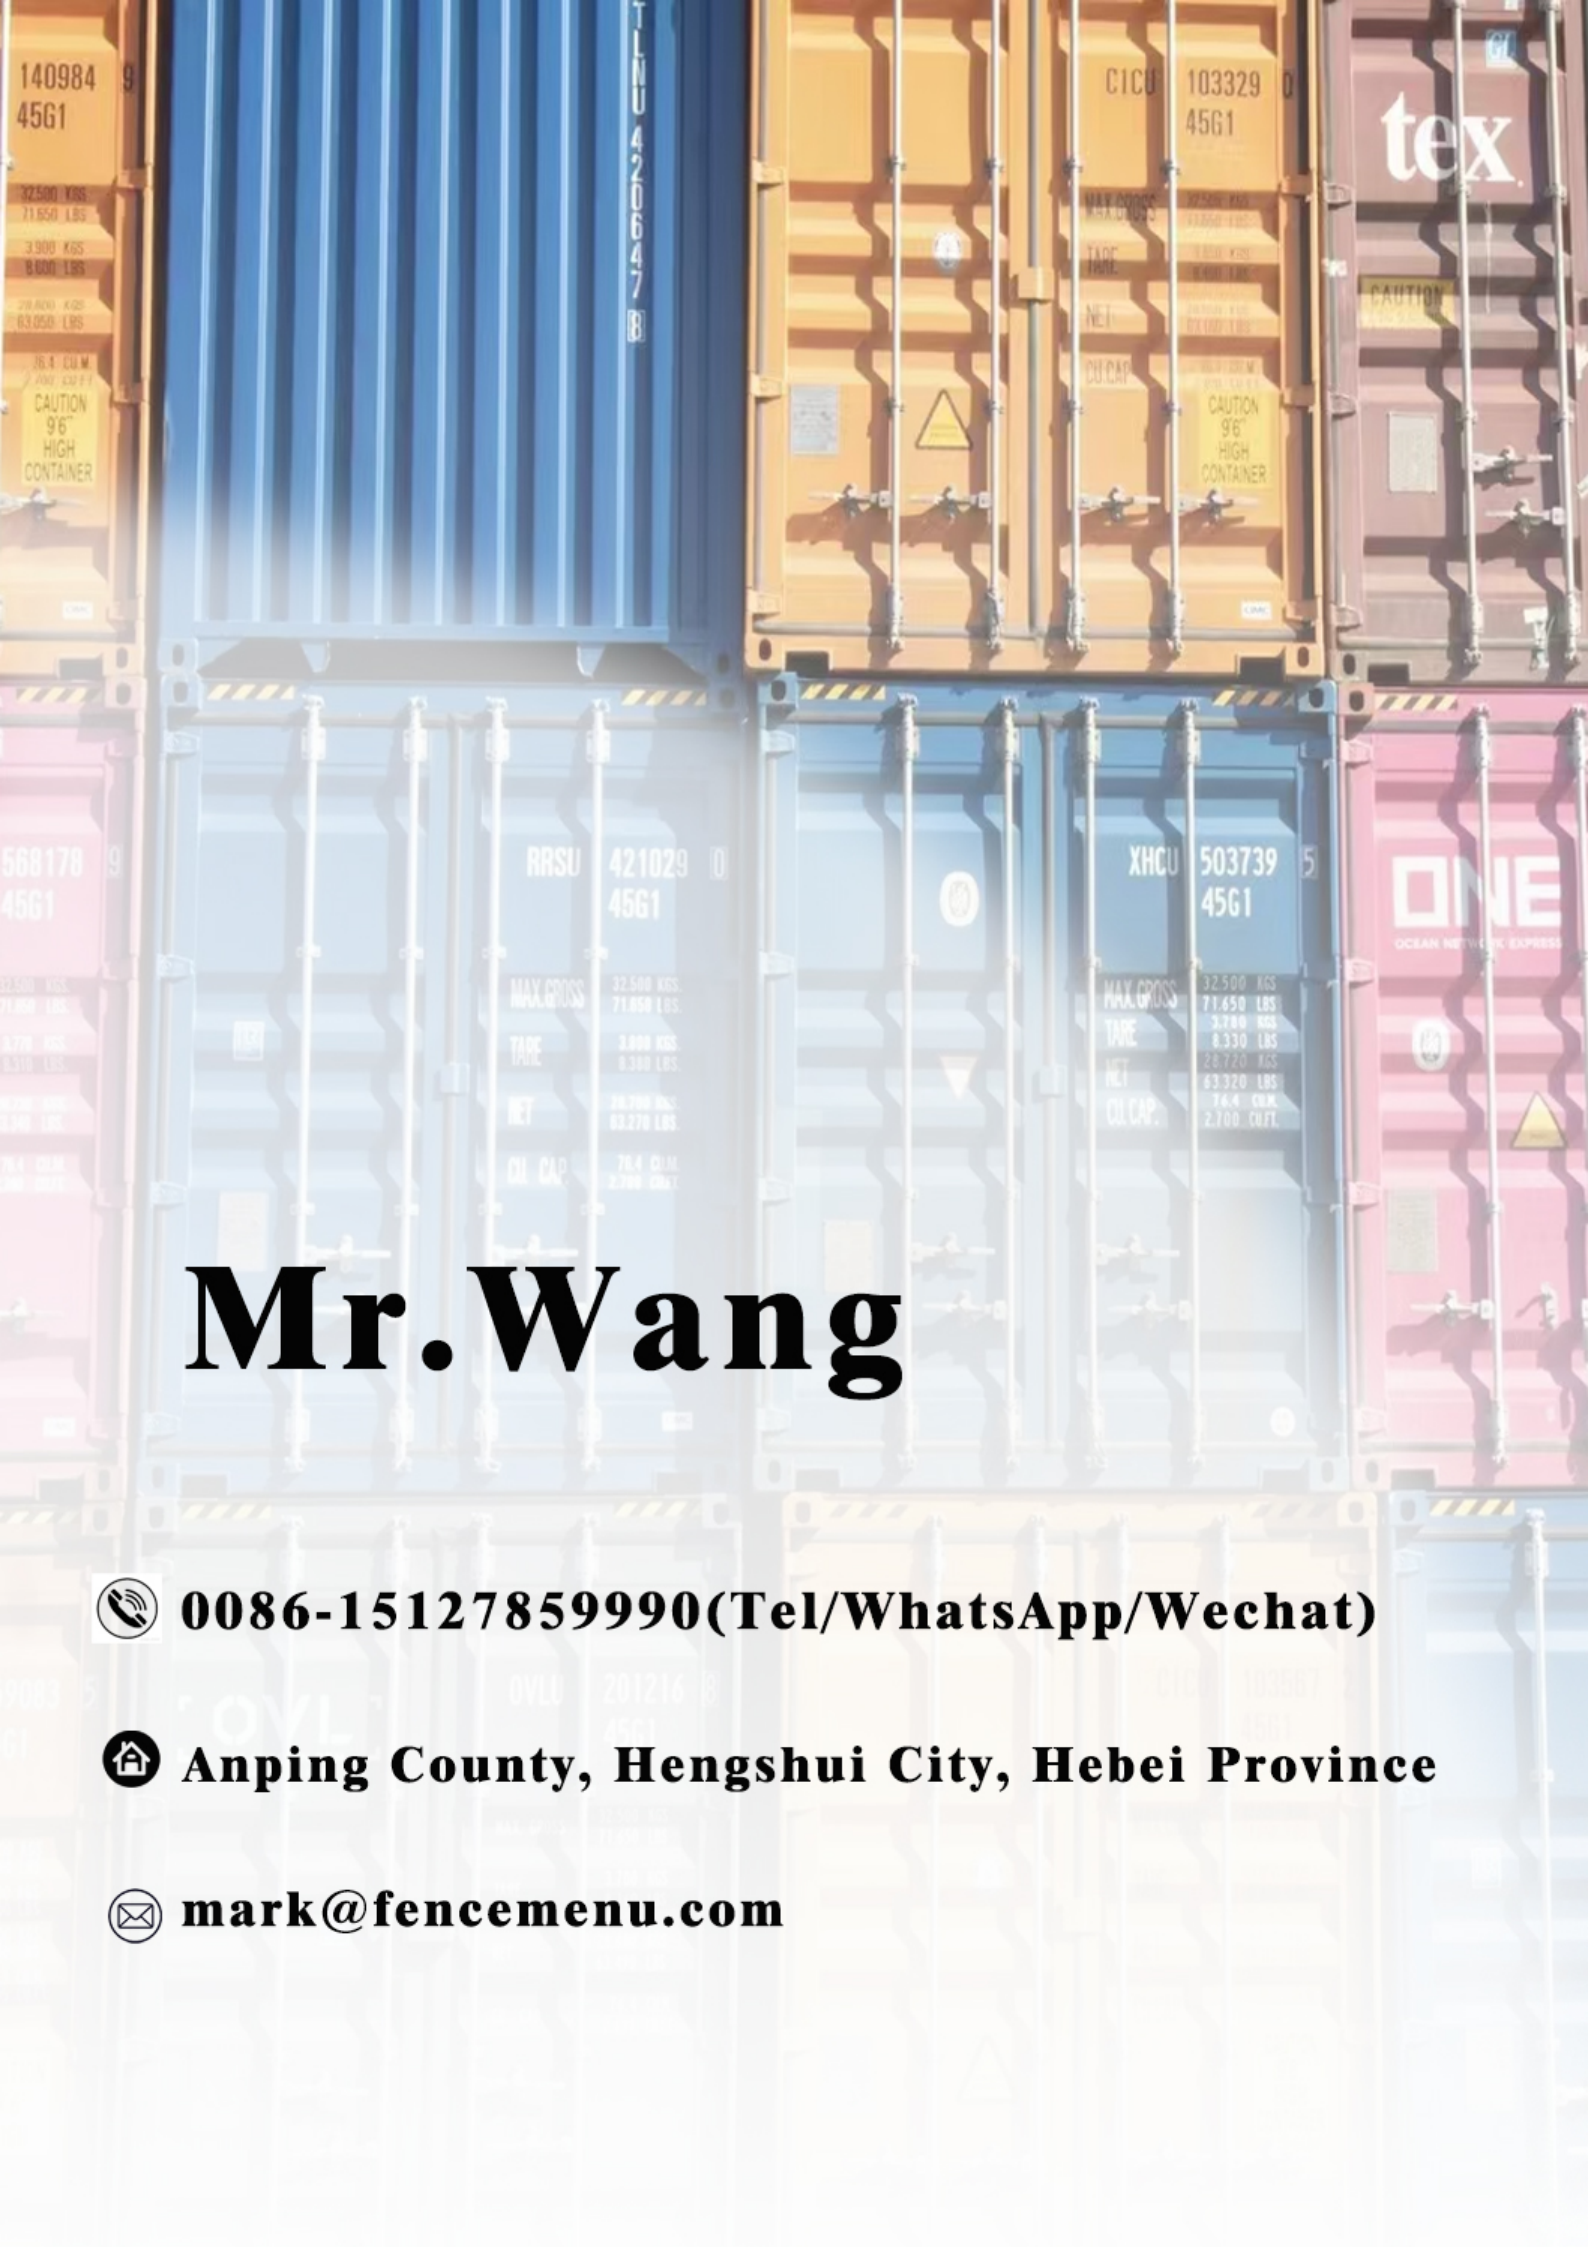

Mr. Wang



0086-15127859990(Tel/WhatsApp/Wechat)



Anping County, Hengshui City, Hebei Province



mark@fencemenu.com