


SP Submersible SLURRY PUMP

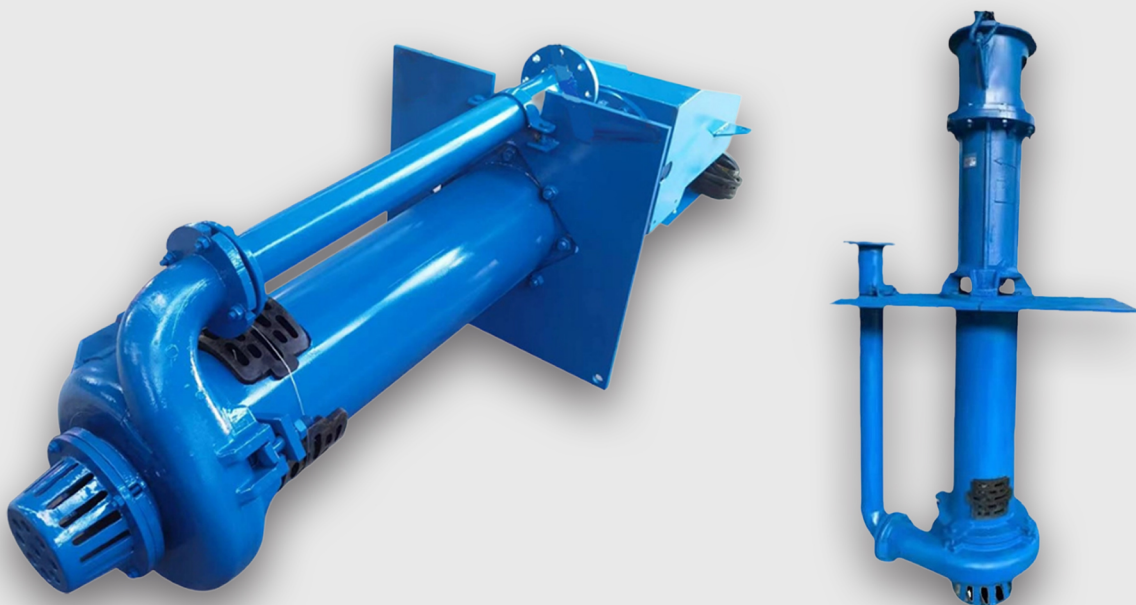

Product Overview

The submersible pump is a vertical centrifugal slurry pump, immersed in liquid, used for conveying abrasive, coarse-particle, high-concentration slurries. It requires no shaft seal or sealing water and can operate normally even with insufficient suction. The pump body is made of wear-resistant metal, and the impeller is made of wear-resistant metal, rubber, or polyurethane. All submerged parts are lined with rubber. It is suitable for conveying corrosive slurries.

Features

Vertical submersible design allows the pump body to operate submerged, eliminating the need for shaft seals and reducing the risk of leakage.

Suitable for conveying abrasive, high-concentration, or solid-particle-containing slurry media.


The flow-through components are made of wear-resistant metal or rubber materials, which are wear-resistant and corrosion-resistant.

Simple structure, easy installation, and low maintenance cost

SP Submersible

SLURRY PUMP

24

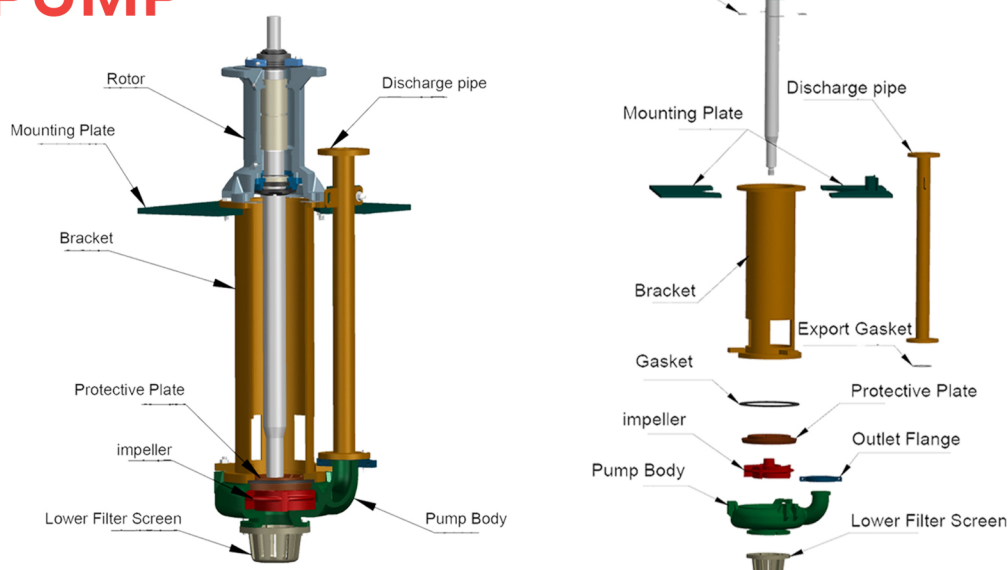

Technical parameters

Product Name	SP Submersible Slurry Pump
Pump type structure	Vertical submersible centrifugal slurry pump
Rated flow rate	5–1500 m ³ /h
Rated flow rate	5–45 m
underarm length	0.9–3.0 m (customizable)
working methods	underarm running
Material of flow-through components	Wear-resistant alloy / rubber
driving method	direct motor connection
Applicable media	Slurry containing solid particles, mineral slurry, mud
Installation method	Vertical fixed installation

Features

Submersible shafts of different lengths can be configured according to operating conditions to adapt to different liquid levels.

Stable operation, suitable for continuous working conditions